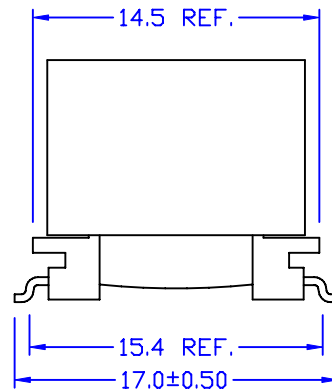

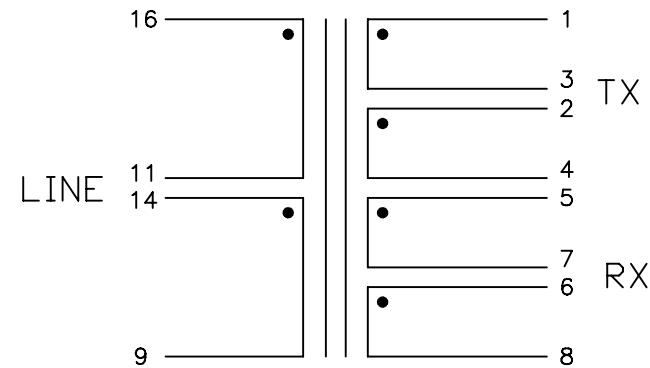
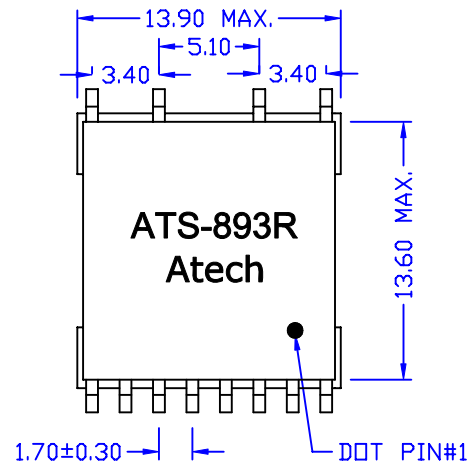


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 550m OHM MAX.(2-3 SHORT)
PIN 5-8 = 1.5 OHM MAX.(6-7 SHORT)
PIN 16-9 = 3 OHM MAX.(11-14 SHORT)
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) : = 1.4mH ±10%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 16-9 (11-14,1-2-3-4,5-6-7-8,SHORT) = 12uH MAX.
PIN 5-8 (6-7,1-2-3-4,9-11-14-16, SHORT) = 5uH MAX.
PIN 1-4 (2-3,5-6-7-8,9-11-14-16, SHORT) = 1uH MAX.
- INTERWINDING CAP. (@100KHZ,0.1Vrms) :
PIN 16-1(9-11-14-16,1-2-3-4 SHORT) = 40pF MAX.
PIN 16-5(9-11-14-16,5-6-7-8, SHORT) = 40pF MAX.
PIN 1-5(1-2-3-4,5-6-7-8,SHORT) = 45pF MAX.
- T.H.D. (@30KHZ, 2Vrms) :
PIN 16-9(11-14,2-3,6-7SHORT, 1-4W/H 5.6 OHM,5-8W/H 25 OHM)
= -90dB MAX.
- TURN RATIO(@500KHZ,0.1Vrms) :
PIN 16-9 : 1-4 = 4.2 ±2%(11-14,2-3 SHORT)
PIN 16-9 : 5-8 = 2±2%(11-14,6-7 SHORT)
- HI-POT : (@1.5KVAC, 1mA, 2S)
PIN 1-16(2-3,4-5,6-7,11-14,SHORT)
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATS-893R
RELEASE		04/25/2008	PAIR	VINCENT	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						04/25/08		Pair