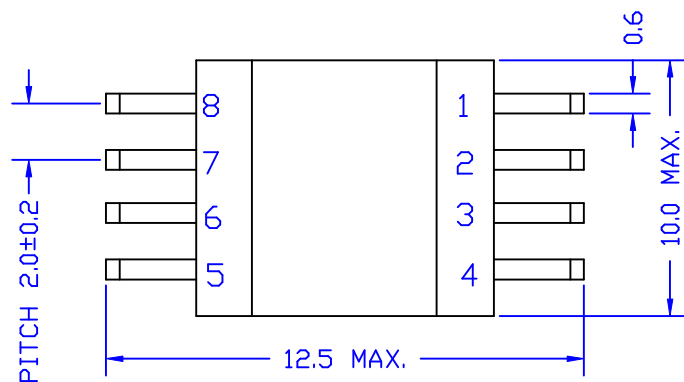
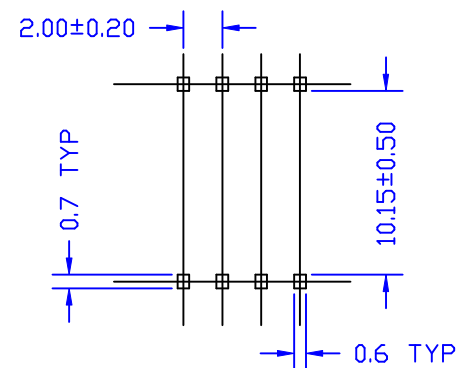
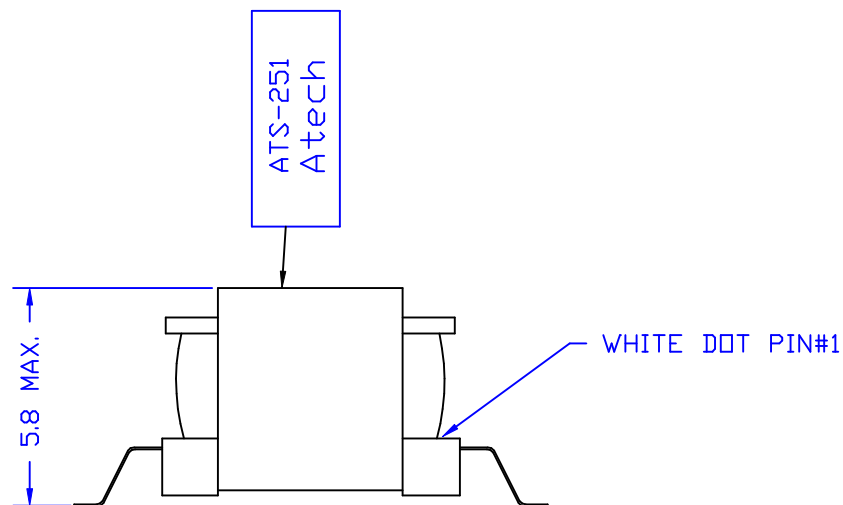


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-4 = 570 Ω HM MAX.
PIN 5-8 = 100 Ω HM MAX.
2. INDUCTANCE (@ 1 KHZ, 1 Vrms) :
PIN 5-8 = 700 mH MIN.
3. IMPEDANCE (@ 1 KHZ, 1 Vrms, PIN 5-8 W/H 1500 Ω HM LOAD) :
PIN 1-4 = 10K Ω HM +/- 10%
4. INSERTION LOSS (@ 1KHZ, 1Vrms, PIN 5-8 W/H 1500 Ω HM LOAD)
= 1db MAX.
5. FREQ. RESP.(REF. 1KHZ)
@ 300HZ = +/- 1 dB @ 4KHZ = +/- 0.5 dB
6. TURNS RATIO (@12KHZ,1Vrms) : PIN 1-4 : PIN 5-8 = 2.58 +/- 2%
7. HI-POT (@1000 VAC, 1 mA, 2 sec) PIN 1-5
8. RoHS COMPLIANCE

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 10K : 1. 5K TRANSFORMER	
								DWG. NO. ATS-251R	
	RELEASE	03/14/2006	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N CTP709001A	DRAW <i>Pair</i>	
REVISIONS						03/14/06			