

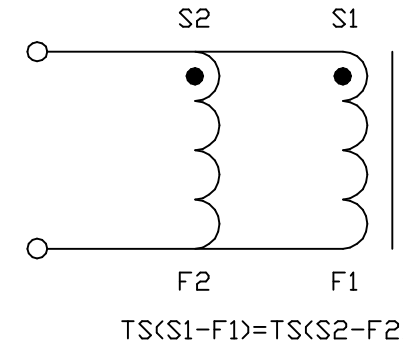


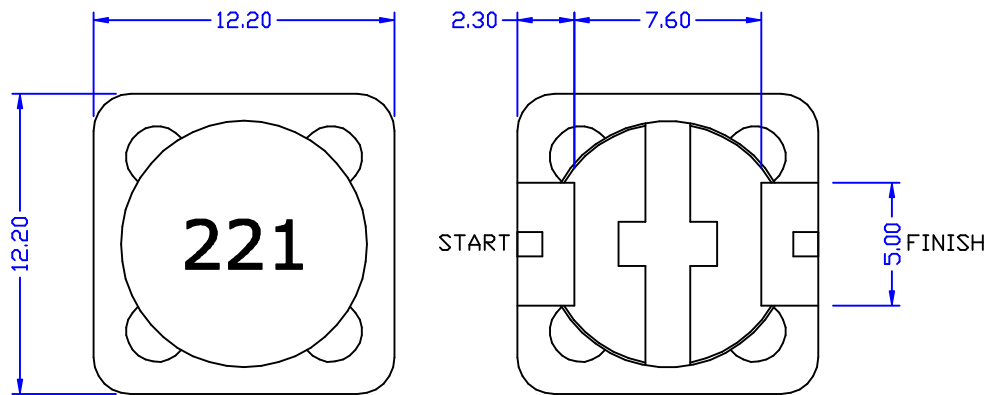

ELECTRICAL SPECIFICATIONS@25°C :

1. INDUCTANCE 1KHZ/1V : $L_{0A} (S-F) = 220\mu H \pm 20\%$
 $L_{1.2A}/L_{0A} \times 100\% = 80\% \text{ MIN.}$
2. DCR (S-F) : 390 mOHM MAX.
3. HI-POT TEST WDG TO CORE (2mA) : 100Vdc 60S
4. INSULATION RESISTANCE WDG TO CORE (100Vdc) : 100 MOHM MIN.

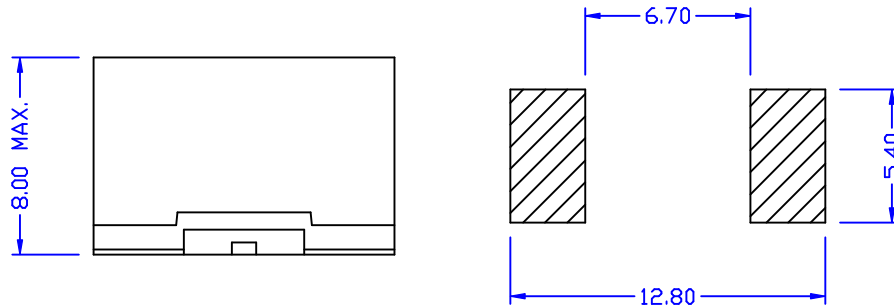

TOLERANCES : XX.X $\pm$ 0.25
 X.XX $\pm$ 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 200uH CHOKE		
								DWG. NO. ATSL-221-122		
	RELEASE	10/29/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1OF 1		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	<i>Pair</i>	
REVISIONS						10/29/02				