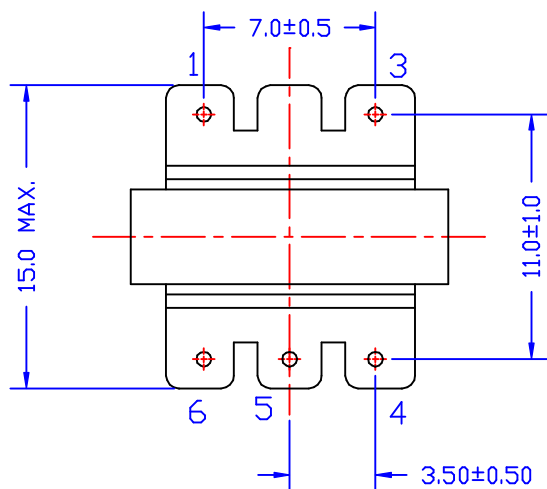
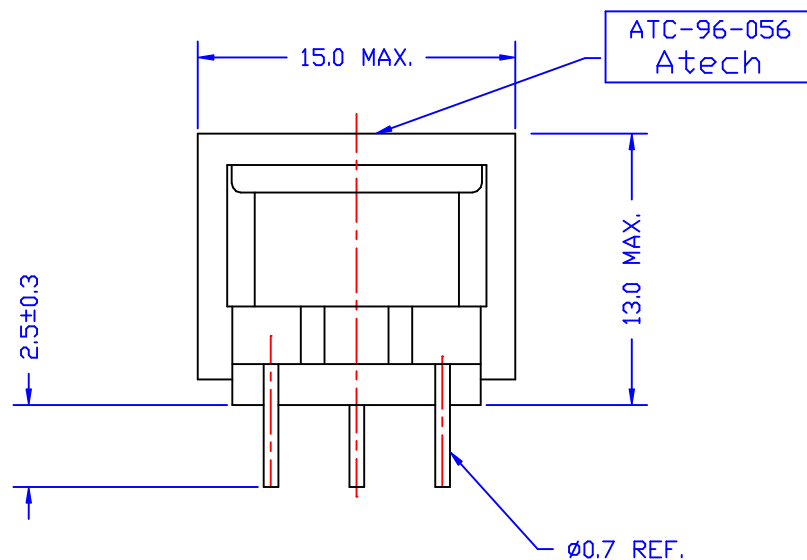


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 Ω M MAX, PIN 4-6 = 37 Ω M MAX.
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 2H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M+/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 Ω M) : 0.82dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = +/-0.4dB
@4KHZ = +/-0.4dB
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 20dB MIN.
@4KHZ = 20dB MIN.
7. TURNS RATIO (@12KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 +/- 1%
8. HI-POT (@1200VAC, 1mA, 2 SEC.) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 600 TRANSFORMER	
							DWG. NO. ATC-96-056	
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS							DRAW <i>Pair</i>	