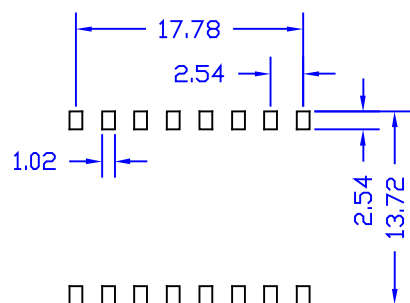
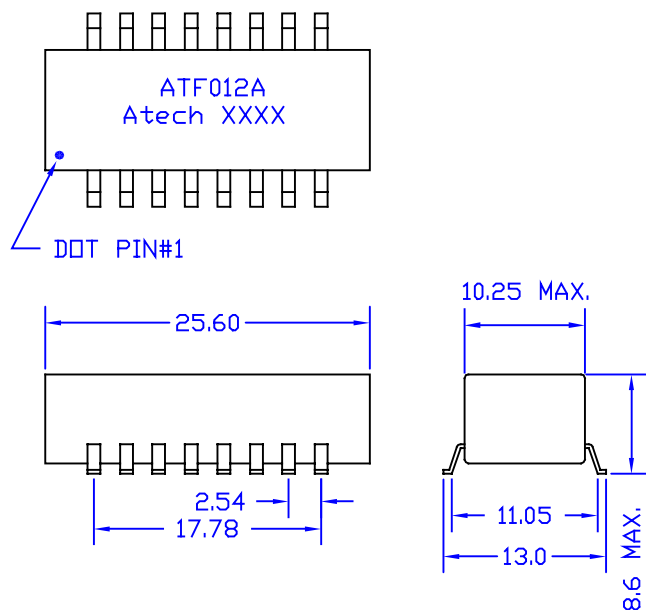


ELECTRICAL CHARACTERISTICS:(PE-B6003 COMPATIBLE)

1. TUT INSERTION LOSS : -4.0dB MAX. @6MHZ
-3.5dB MAX. @7.5MHZ
-4.0dB MAX. @9MHZ
2. TUT ATTENUATION : -40dB MIN. @2MHZ
-50dB MIN. @27MHZ
3. TUT RETURN LOSS : -10dB MINIMUM @6MHZ - 9MHZ
4. ISOLATION VOLTAGE : 1500 Vrms (INPUT TO OUTPUT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE HOME LAN TUT TRANSFORMER	
								DWG. NO. ATF012A	
	RELEASE	04/13/00	RDY		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						04/13/00			