

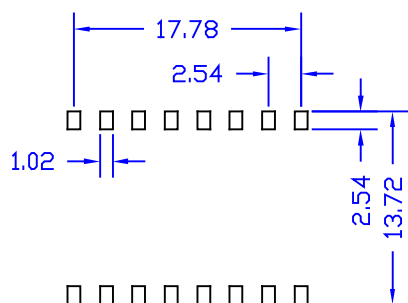
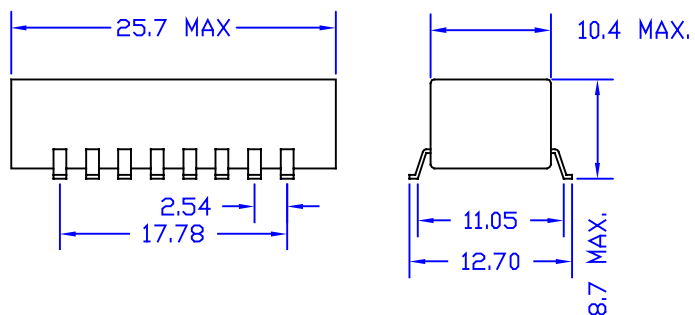


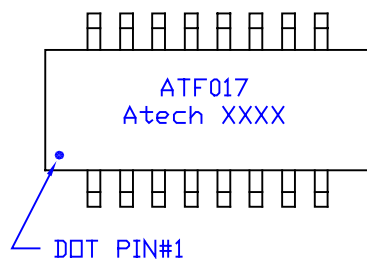

SUGGESTED FOOTPRINT

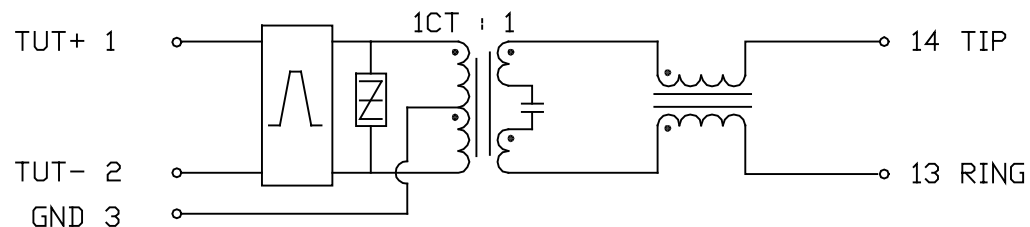

ELECTRICAL CHARACTERISTICS:(EPB5035G COMPATIBLE)

1. TUT INSERTION LOSS : -4.0dB MAX. @6MHZ
-4.0dB MAX. @7.5MHZ
-4.0dB MAX. @9MHZ
2. TUT ATTENUATION : -65dB MIN. @1MHZ
-47dB MIN. @27MHZ
3. TUT RETURN LOSS : -9.5dB MINIMUM @6MHZ - 9MHZ
4. ISOLATION VOLTAGE : 1500 Vrms (INPUT TO OUTPUT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HOME LAN TUT B/P FILTER	
							DWG. NO. ATF017	
	RELEASE	06/19/00	PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/19/00	DRAW <i>Pair</i>	