



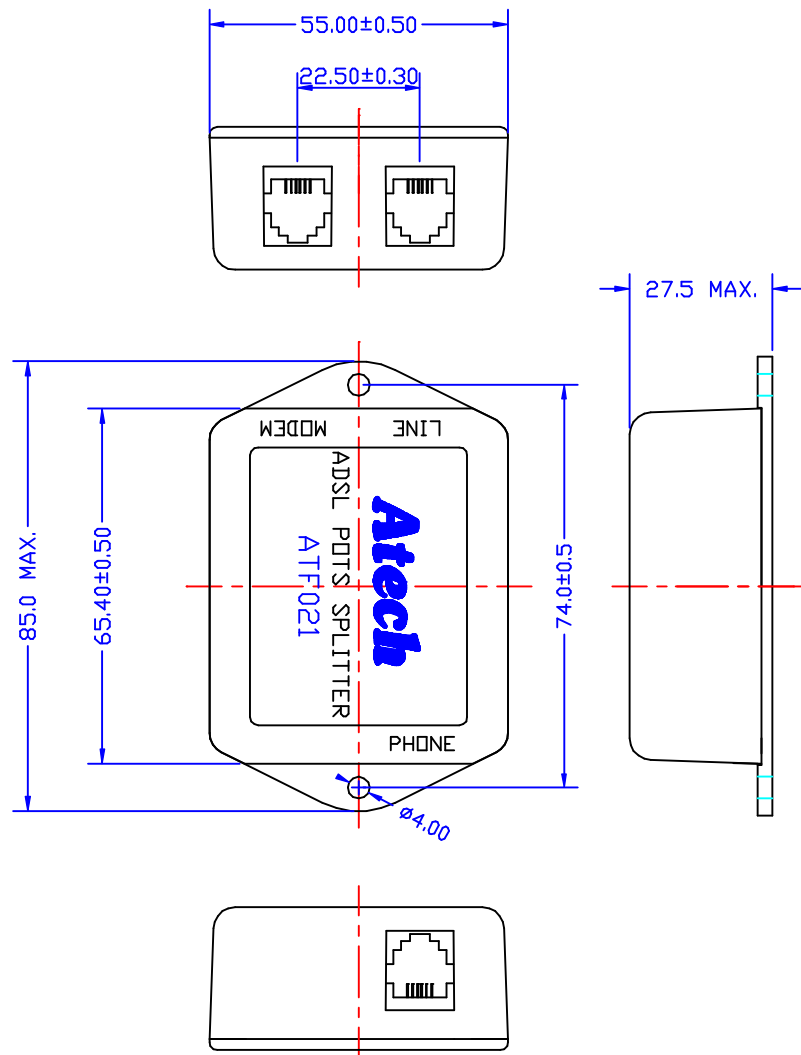

ELECTRICAL CHARACTERISTICS :

1. MEET ANNEX E.2 OF ITU-T REC.G.992.1
2. DCR EACH LINE : 10 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 7KHZ TYP.
4. RIPPLE(@200-4KHZ) : +/-0.5dB
5. INSERTION LOSS(@200-4KHZ) : 0.5dB MAX.
6. ATTENUATION(@8KHZ) : 14dB TYP.
(@20KHZ&ABOVE) : 60dB TYP.
7. RETURN LOSS(@200-4KHZ, REF 600 OHM) : 20dB MIN.
8. LONGITUDINAL BALANCE(@200-4KHZ) : 53dB MIN.
9. COMMON MODE REJECTION(@40KHZ) : 55dB MIN.
(@1.1MHZ) : 25dB MIN.
10. DELAY DISTORTION(@200-4KHZ) : 150uSEC MAX.
11. POTS LOOP CURRENTS : 120mA
12. POTS TIP TO RING DC VOLTAGE : 0-200V
13. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150Vrms

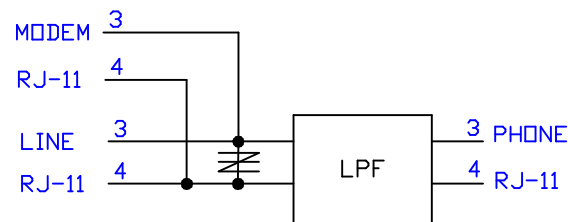

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ADSL POTS SPLITTER	
A	ATTENUATION	03/12/01	PAIR		SUEDY			DWG. NO. ATF021	
	RELEASE	01/17/2001	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	01/17/01		DRAW Pair
REVISIONS									