



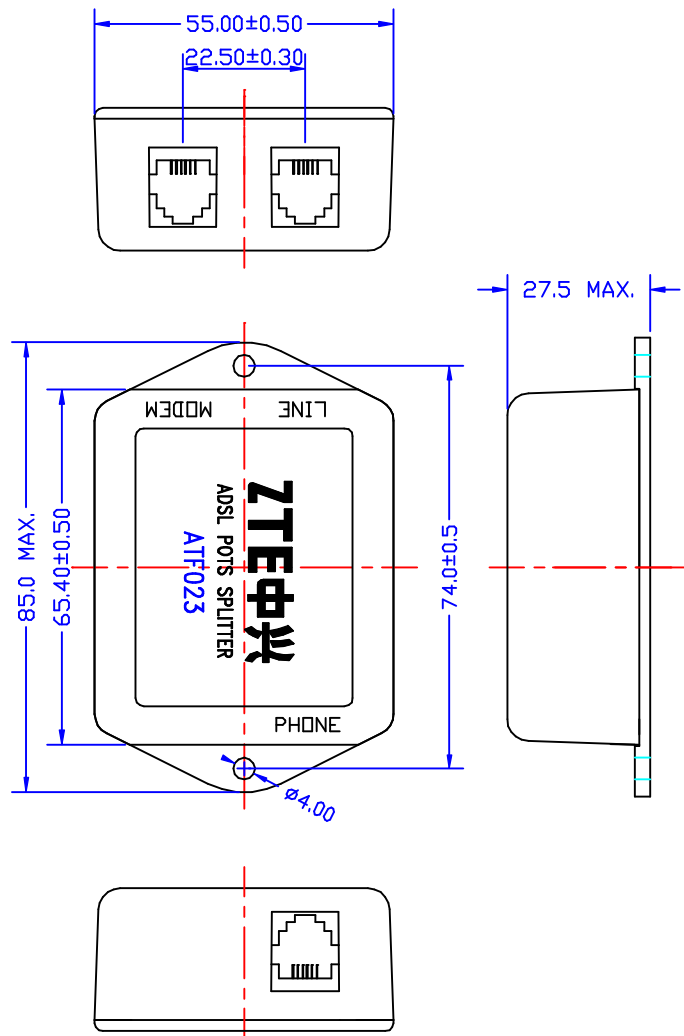

ELECTRICAL CHARACTERISTICS :

- 1.DCR EACH LINE : 10 OHM MAX.
- 2.POTS 3dB CUTOFF FREQUENCY : 8.5KHZ TYP.
- 3.RIPPLE(@200-4KHZ) : +/-0.5dB
- 4.INSERTION LOSS(@200-4KHZ) : 0.5dB MAX.
- 5.ATTENUATION(@20KHZ&ABOVE) : 50dB TYP.
- 6.RETURN LOSS(@200-3.4KHZ,REF 600 OHM) : 14dB MIN.
- 7.LONGITUDINAL BALANCE(@200-3KHZ) : 40dB MIN.
- 8.DELAY DISTORTION(@200-4KHZ) : 100uSEC MAX.
- 9.POTS LOOP CURRENTS : 120mA
- 10.POTS TIP TO RING DC VOLTAGE : 0-200V
- 11.POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150Vrms
- 12.BILLING TONE SIGNAL : 12KHZ±80HZ

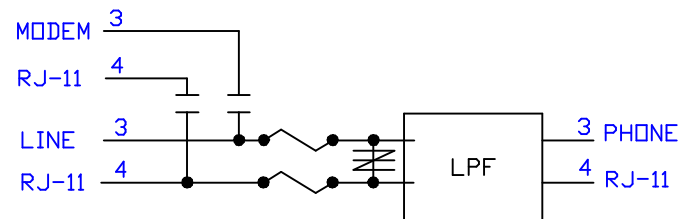

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004	TITLE ADSL POTS SPLITTER			
							DWG. NO. ATF023			
	RELEASE	03/22/2001	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>	
REVISIONS						03/22/01				