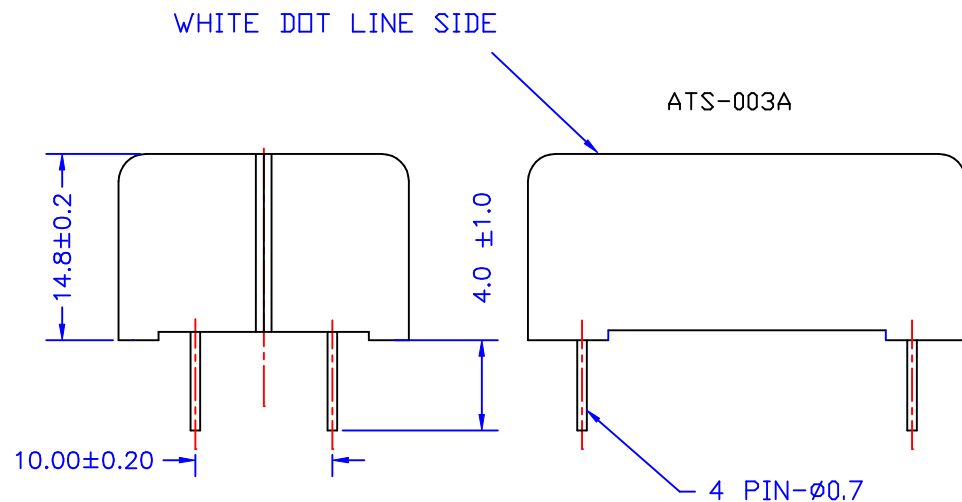


ELECTRICAL CHARACTERISTICS :

1 IMPEDANCE :

PIN 1-3 : 4-6 = 600 Ω HM $\pm$ 10% : 600 Ω HM (AT 1KHZ, W/H 80mADC)

2 D.C.R. : PIN 1-3 = 147 Ω HM $\pm$ 15%

PIN 4-6 = 104 Ω HM $\pm$ 15%

3 INSERTION LOSS (300HZ TO 3.5KHZ, W/H 80mADC)

AT 300HZ = 4.5 db MAX.

AT 1KHZ = 2.7 db MAX.

AT 3.5KHZ = 2.7 db MAX.

4 RETURN LOSS (300HZ TO 3.5KHZ, W/H 80mADC)

AT 300HZ = 9.5 db MIN.


AT 1KHZ = 11 db MIN.

AT 3.5KHZ = 11 db MIN.

5 HI-POT = 3750VAC, 60HZ, 1mA, 1 MINUTE (LINE-DEVICE)

6 INSULATION RES. = 100 Ω HM MIN. AT 500 VDC (LINE - DEVICE)

7 POLARITY : (PIN 1 & PIN 6 INPHASE)

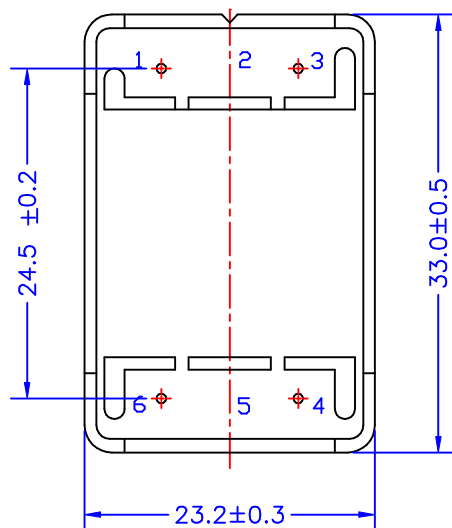

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-003A	
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS								