





WHITE DOT (DCR. +/-5.1~10%)



BLACK DOT PIN#1 (DCR. +/-5%)

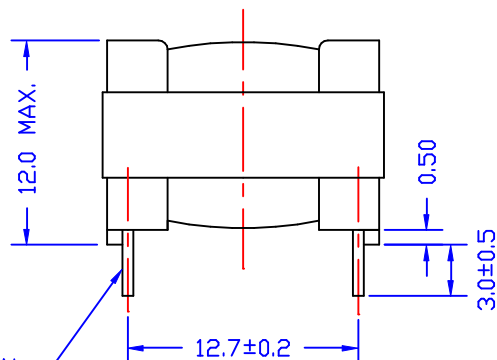

0.5 SQ. PIN
OR Ø0.6 PIN

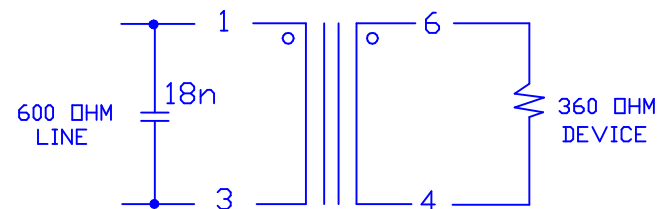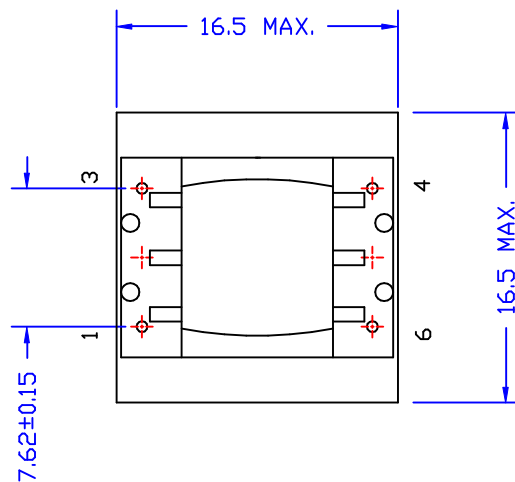

ELECTRICAL CHARACTERISTICS: (FOR 56Kbps, 2811B COMPATIBLE)

1. D.C.R. : PIN 1-3 = 120 OHM +/-10% PIN 6-4 = 120 OHM +/-10%
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL) : PIN 1-3 = 18H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 3.5KHZ = 25dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 2.1 dB TYP.
5. FREQ. RESPONSE: (REF. 1KHZ) 100 TO 4KHZ = +/-0.1dB
6. LONGITUDINAL BALANCE : 200HZ-3.5KHZ 60dB MIN.
7. TURN RATIO : PIN 1-3 : 6-4 = 1 +/-1%
8. DISTORTION : 150HZ, -3dBm : -75dB MAX.
8. HI-POT : (@1650VAC, 1mA, 2SEC.) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 360 TRANSFORMER	
							DWG. NO. ATS-273BP	
	RELEASE	03/31/2003	DOLLY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/31/03		