
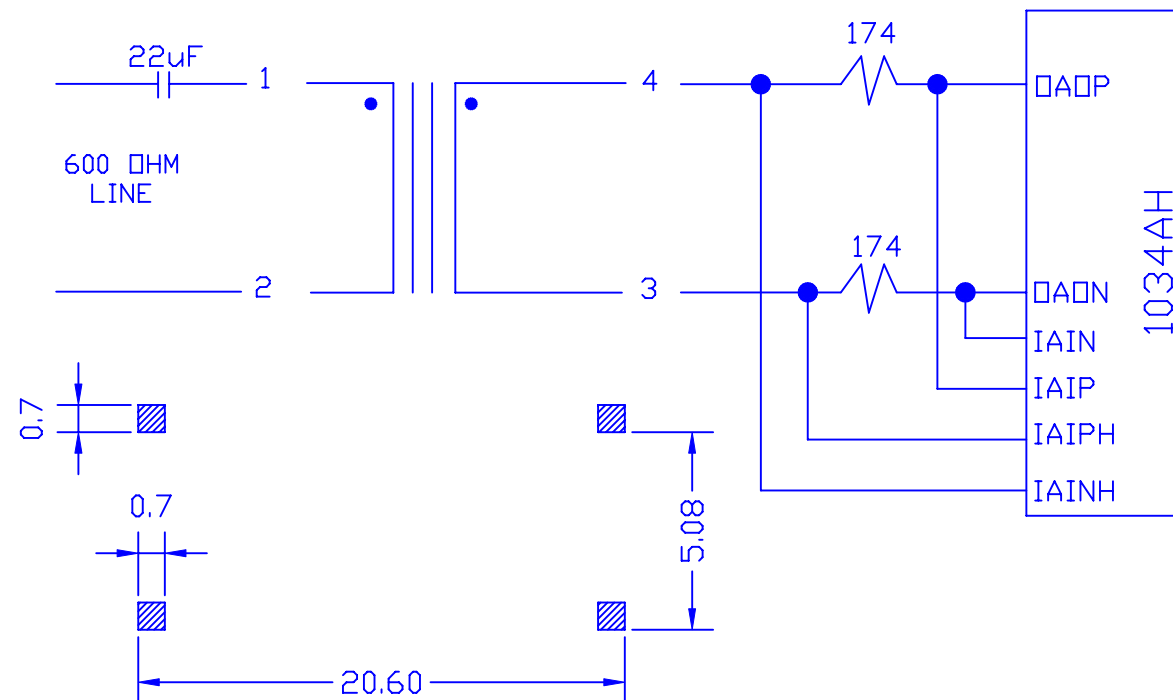
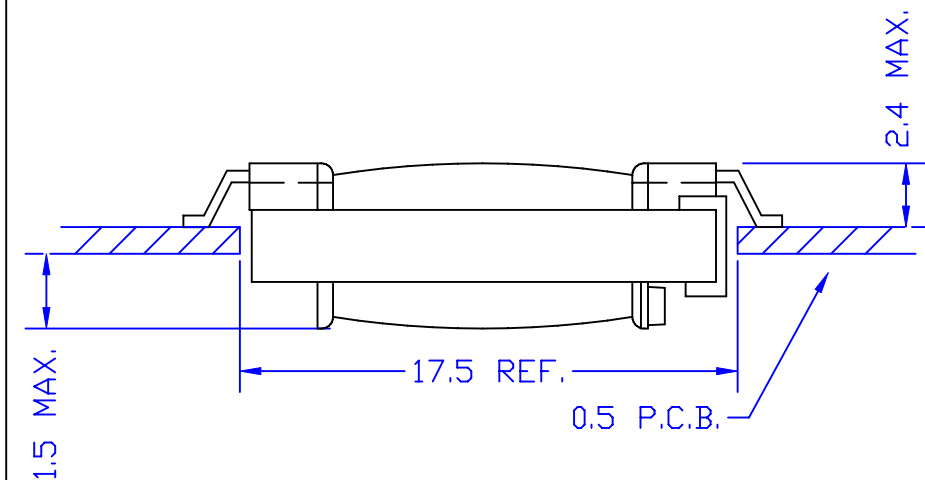


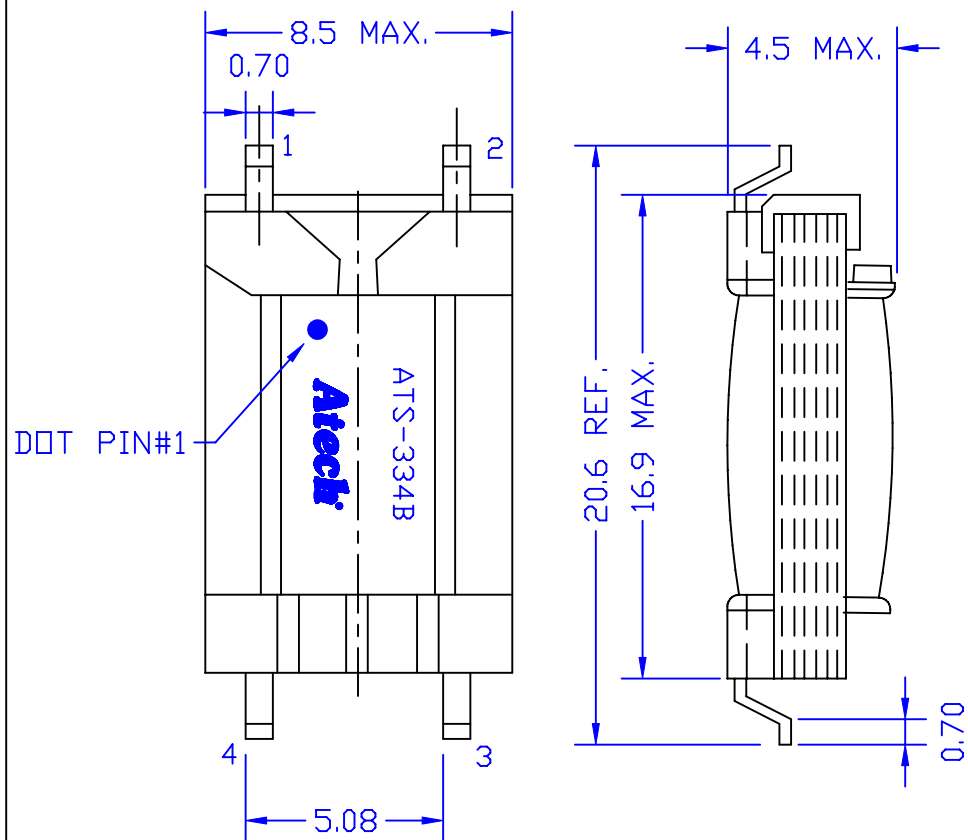

ELECTRICAL CHARACTERISTICS: (FOR 1034AH V.90)

1. D.C.R. : PIN 1-2 = 138 OHM MAX. PIN 3-4 = 163 OHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-2 = 1.5Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm)
PIN 1-2 = 2.6 dB+/-0.2dB
4. FREQ. RESP.(REF. 1KHZ) : @300HZ-4KHZ = +/-0.15dB
5. RETURN LOSS (REF. 600 OHM) : @ 300HZ - 4KHZ = 30dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1+/-1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D.(@600HZ,-10dBm) = -85dB MAX.
9. HI-POT (@1250VAC, 1mA, 2SEC.) PRI.-SEC.
10. IR REFLOWABLE (PLEASE SEE PROFILE)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 1034AH TRANSFORMER	
								DWG. NO. ATS-334B	
A	P/N	06/28/2006	PAIR		EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
	RELEASE	12/24/98	PAIR		SUEDY	DATE	P/N:	DRAW <i>Pair</i>	
NO	DESCRIPTION	DATE	BY	CHK	APPD	12/24/98	CTP30801LA		
REVISIONS									