
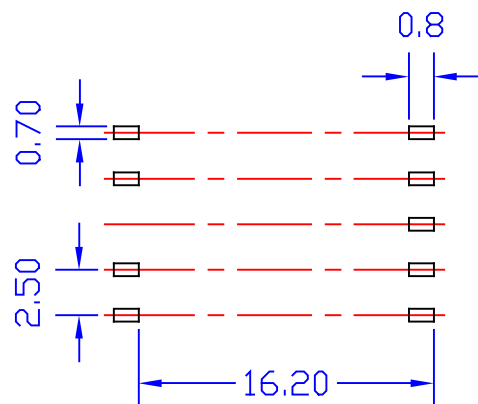
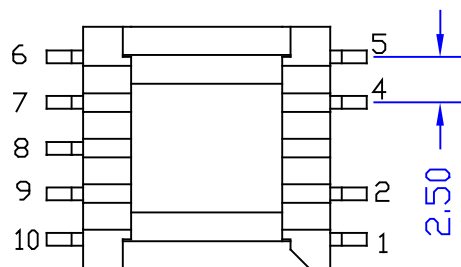
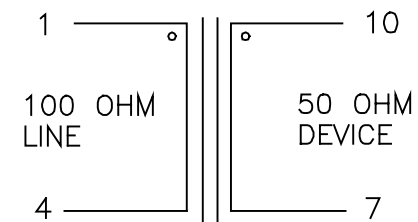
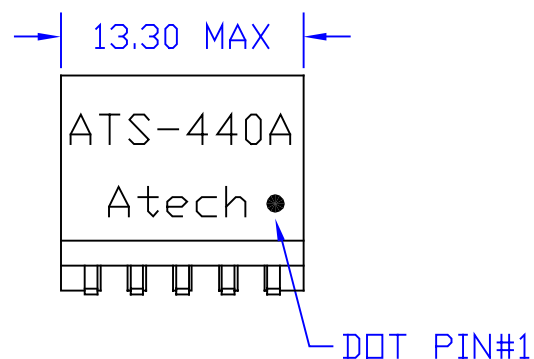


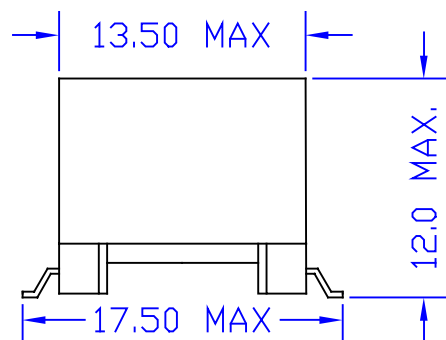

ELECTRICAL CHARACTERISTICS: (MEET UL 1950, IEC-950, 35625 COMPATIBLE)

1. D.C.R. : PIN 1-4 = 2.7 OHM MAX. PIN 10-7 = 0.8 OHM MAX.
2. INDUCTANCE : (@10KHZ, 0.1Vrms) PIN 1-4 = 1.5mH +/-5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms)
PIN 1-4 (W/H 10-7 SHORT) = 18 uH MAX.
4. Cw (@100KHZ, 0.1Vrms) PIN 1-10 = 35pF MAX.
5. TURN RATIO (@500KHZ, 1Vrms) PIN 1-4 : PIN 10-7 = 1.423+/-2%
6. LONGITUDINAL BALANCE : AT 100KHZ = 60dB MIN.
7. HI-POT (@1800 VAC, 1mA, 2SEC.) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER		
							DWG. NO. ATS-440A		
	RELEASE	07/11/00	FENG		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						07/11/00			