
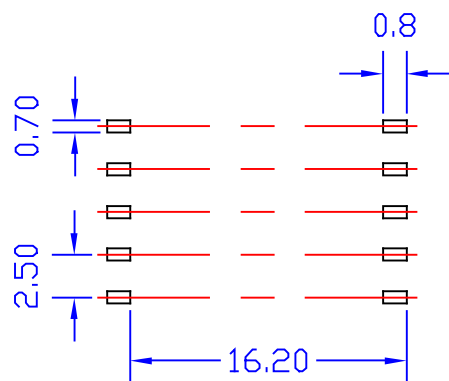
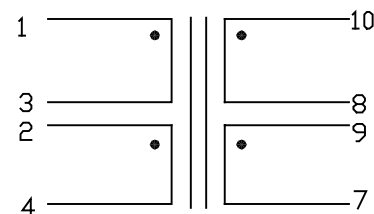
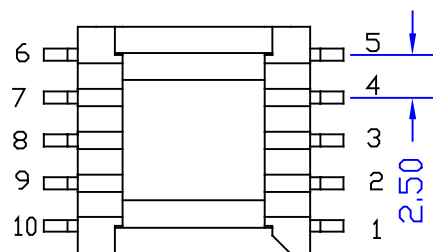
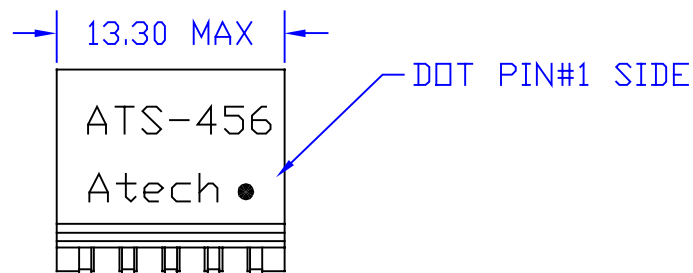


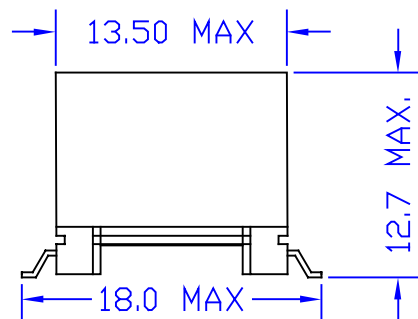

ELECTRICAL CHARACTERISTICS: (FOR 51025 COMPATIBLE)

1. D.C.R. : $10-8=9-7=0.74 \text{ } \Omega \text{HM} \pm 10\%$ $1-3=0.57 \text{ } \Omega \text{HM} \pm 10\%$ $2-4=0.78 \text{ } \Omega \text{HM} \pm 10\%$
2. INDUCTANCE : (@20KHZ, 2Vrms) $1-4 \text{ (W/H } 3-2 \text{ SHORT)} = 1.2 \text{ mH} \pm 10\%$
3. LEAKGE INDUCTANCE : (@100KHZ, 0.1Vrms) $1-4 \text{ (W/H } 2-3, 8-9, 7-10 \text{ SHORT)} = 10 \text{ } \mu\text{H MAX.}$
4. INTERWINDING CAP. : (@10KHZ, 1Vrms) $10-1 \text{ (W/H } 8-9, 2-3 \text{ SHORT)} = 40 \text{ pF MAX.}$
5. INSERTION LOSS : (@300KHZ, 0 dBm) $10-7 \text{ (2-3, 8-9 SHORT)} = 0.5 \text{ dB MAX.}$
6. FERQ. RESP. : (@REF 300KHZ) @100KHZ= $\pm 0.5 \text{ dB}$, @1.1MHZ= $\pm 0.7 \text{ dB}$,
7. TURN RATIO : (@400KHZ, 1Vrms) $10-7 : 1-4 = 1.1 : 1 \pm 1\%$ (W/H 8-9, 2-3 SHORT)
8. HI-POT (@ 1875 VAC, 1mA, 1SEC) $10-1 \text{ (8-9, 2-3 SHORT)}$

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER		
							DWG. NO. ATS-456		
	RELEASE	06/29/00	FENG		SUEDY		UNITS: M/M	SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD				DATE
REVISIONS						06/29/00			