
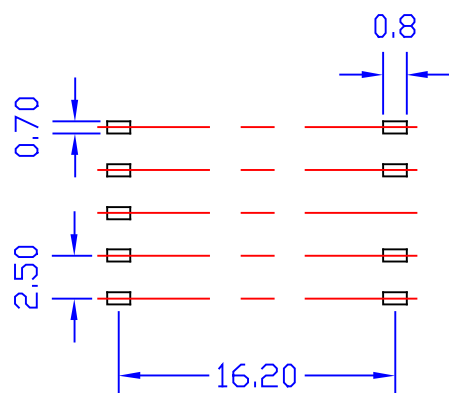
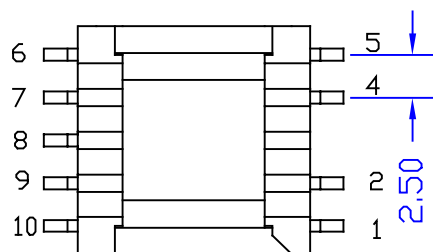
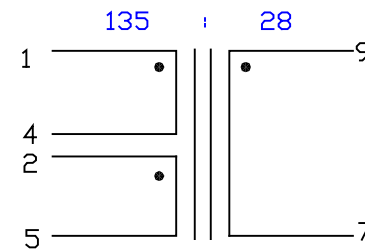



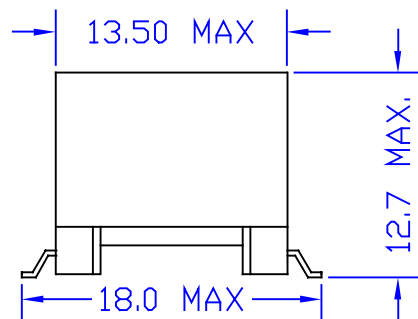

ELECTRICAL CHARACTERISTICS: (FOR 50974 COMPATIBLE)

1. D.C.R. : 1-4=2-5=1.15±10% OHM 9-7=0.6±10% OHM.
2. INDUCTANCE : (@10KHZ, 1Vrms) 1-5(2-4 SHORT,W/H 0-100mADC)=3 mH±6%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 1-5(2-4,7-9 SHORT) = 10uH MAX.
4. INTERWINDING CAP. : (@10KHZ,1Vrms) 1-9(2-4 SHORT) = 100 pF MAX.
4. TURN RATIO : (@400KHZ, 1Vrms) 1-4:2-5 = 1±1% 1-5:9-7 = 2.2±1% (2-4 SHORT)
5. HI-POT (@ 2050 VAC, 1mA, 1SEC) 1-9 (2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. No. ATS-457	
	RELEASE	07/03/00	FENG		SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/03/00			
REVISIONS								SHEET 1 of 1	
								DRAW <i>Pair</i>	