

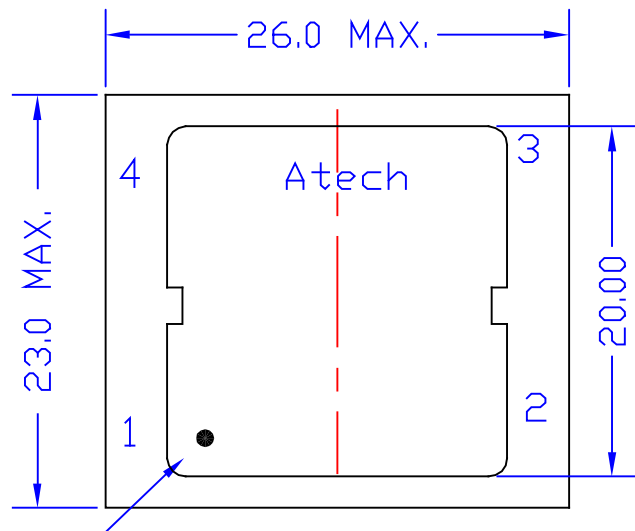


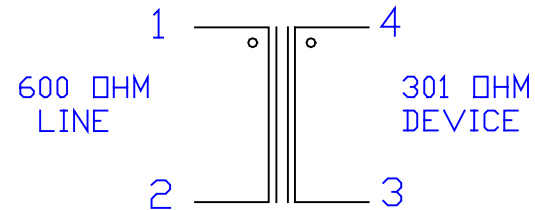

BLACK DOT PIN#1

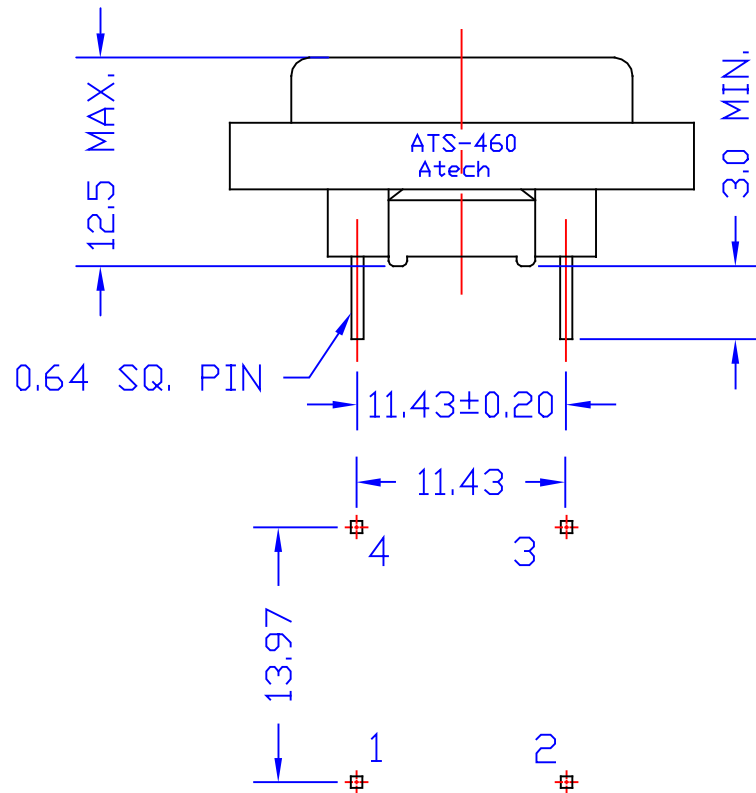

ELECTRICAL CHARACTERISTICS: (MEET UL1950)

1. D.C.R. : PIN 1-2 = 164 Ω HM $\pm$ 10% PIN 3-4 = 168 Ω HM $\pm$ 10%
2. INDUCTANCE PARALLEL : (@200HZ, 1Vrms): PIN 1-2 = 20H TYP.
3. RETURN LOSS : (@REF. 600 Ω HM) @ 300HZ = 25dB MIN.
@ 3KHZ = 16dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) (PIN4-3 W/H 301 Ω HM)
PIN1-2 = 3.2 $\pm$ 0.5 dB.
5. FREQ. RESP. : (@REF. 1KHZ) @200HZ = $\pm$ 0.25dB
@4KHZ = $\pm$ 0.35dB
6. TURN RATIO (@1KHZ, 1Vrms) 1-2:4-3=1 $\pm$ 1%
7. THD (@600HZ, -10dBm)=-85dB MAX. (@150HZ, -3dBm)=-75dB MAX.
8. HI-POT : (@1875VAC, 1mA, 1 SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 301 TRANSFORMER	
							DWG. NO. ATS-460	
	RELEASE	07/05/00	FENG		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						07/05/00		<i>Pair</i>