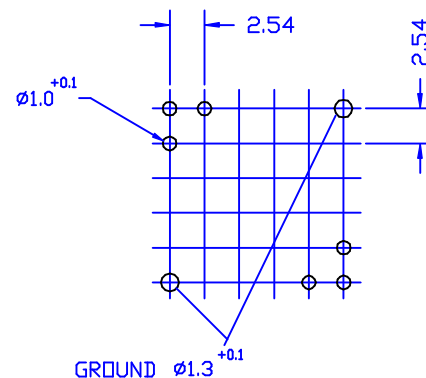
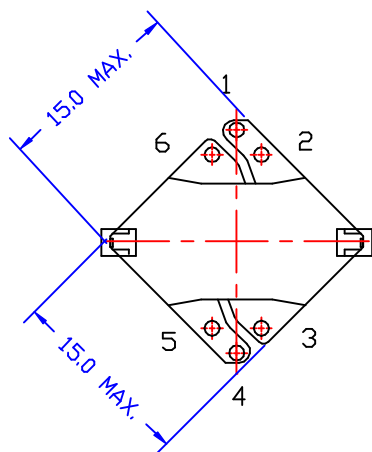
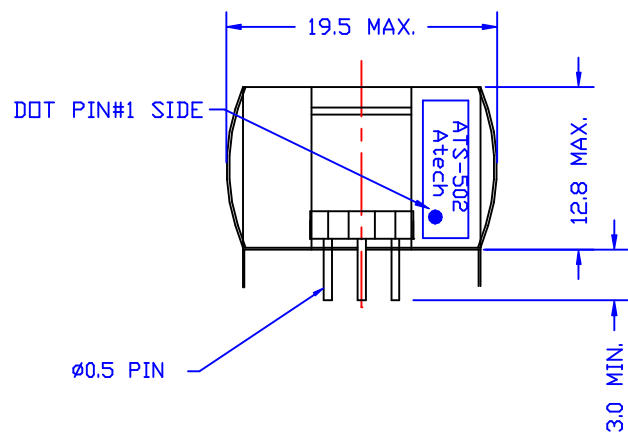


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 6-2 = PIN 3-5 = 3.53 OHM MAX.
2. INDUCTANCE(@1KHZ, 1Vrms) : PIN 6-5(2-3 SHORT) = 24mH+/-5%
(@100mA) : PIN 6-5(2-3 SHORT) = 21.6mH MIN.
3. TURN RATIO(@100KHZ, 1Vrms) : PIN 6-2 : PIN 3-5 = 1+/-1%
4. HI-POT(@500VAC, 1mA, 2SEC) : PRI.-SEC.

						Atech® Atech Technology Co., Ltd. TEL<02>2794-6667 FAX<02>2794-8004		TITLE ADSL INDUCTOR	
								DWG. NO. ATS-502	
A	INDUCTANCE	03/21/01	PAIR		SUEDY	UNITS: M/M		SAFETY	
	RELEASE	01/30/2001	PAIR		SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/30/01		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	