


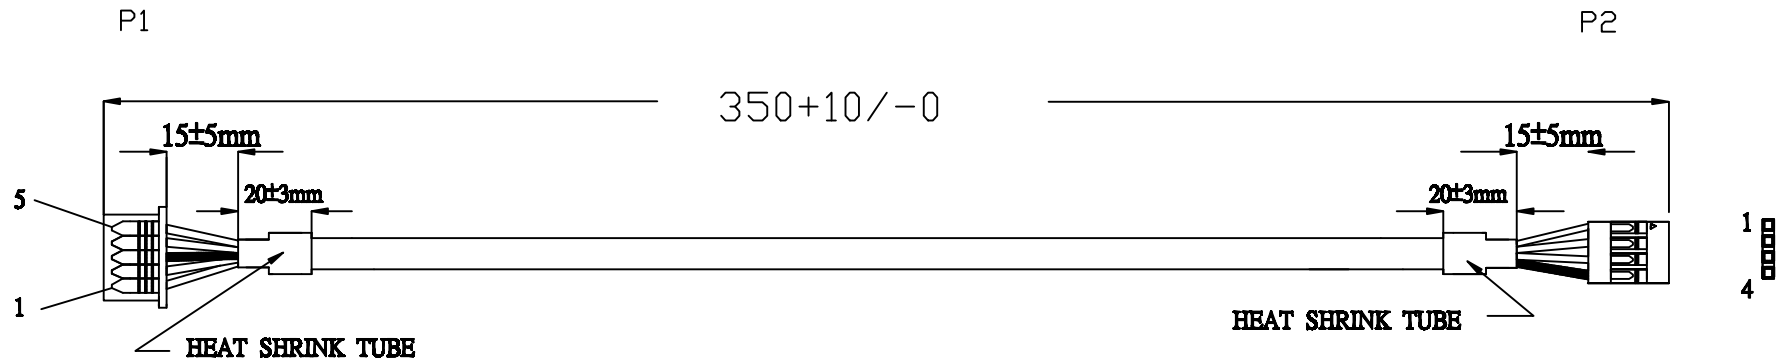

1. CABLE:

UL 2725[28AWG(0.12/7 TC)*1PR+28AWG(0.12/7 TC)*2C
+AL-FOIL/MYLAR+DRAIN WIRE+65% BRAID]

PVC JACKET COLOR:BLACK

OD:4.0±0.15mm REV 2.0

2.CONNECTER:

P1:5P HSG 1.25mm PITCH,TYU P/N:TU1252HNO-05

TERMINAL,TYU P/N:TU1252TPO-A OR EQUIVALENT

P2. 4P HSG 2.54 PITCH TYP P/N:TU5005HNO-1*04

TERMINAL:P/N:YU5005TBM-A OR EQUIVALENT



3.ELECTRIC TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.

<2>絕緣阻抗10兆歐姆

<3>阻抗5歐姆

4.PACKING: EACH PC/ POLYBAG

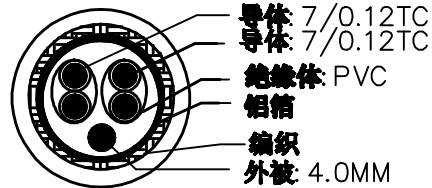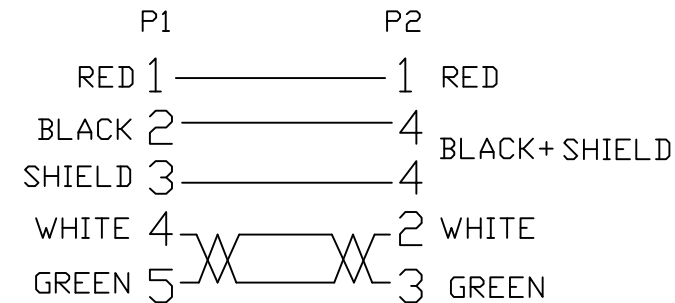

炫龍企業有限公司		文件管制編號(No) SP016	
TRIAX ENTERPRISE CO.,LTD		炫龍料號(Parts No)	
品名(Description)		客戶編號	
USB 2.0 AVG/Client CABLE		CH-332-01	
Scale:		FOR:	
As Drawing		安克華科技有限公司	