

1. CABLE:

UL 2725[28AWG(0.12/7 TC)*1PR+28AWG(0.12/7 TC)*2C
+AL-FOIL/MYLAR+DRAIN WIRE+65% BRAID]

PVC JACKET COLOR:BLACK

OD:4.0±0.15mm REV 2.0

2.CONNECTER:

P1:5P HSG 1.25mm PITCH,TYU P/N:TU1252HNO-05

TERMINAL,TYU P/N:TU1252TPO-A OR EQUIVALENT

P2:5P HSG 2.54 PITCH TYP P/N:TU5005HNO-1*05

TERMINAL:P/N:YU5005TBM-A OR EQUIVALENT

3.ELECTRICLE TEST:


<1>100% OPEN SHORT & MIS WIRE TEST.

<2>絕緣阻抗10兆歐姆

<3>阻抗5歐姆

4.PACKING: EACH PC/ POLYBAG

	P1	P2
RED	1	1
BLACK	2	2
SHIELD	3	3
WHITE	4	4
GREEN	5	5

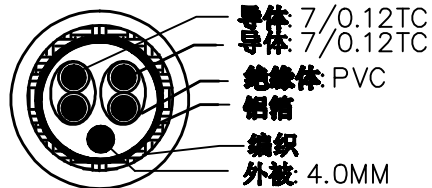

導體 7/0.12TC
導體 7/0.12TC
絕緣體 PVC
鋁箔
編織
外被 4.0MM

炫龍企業有限公司		文件管制編號(No) SP016
TRIAX ENTERPRISE CO.,LTD		
品名(Description) USB 2.0 AVG/ Client CABLE ROHS		炫龍料號(Parts No)
		客戶編號 CH-332-01
Scale: As Drawing	Unit: mm	FOR: 安克華科技有限公司