


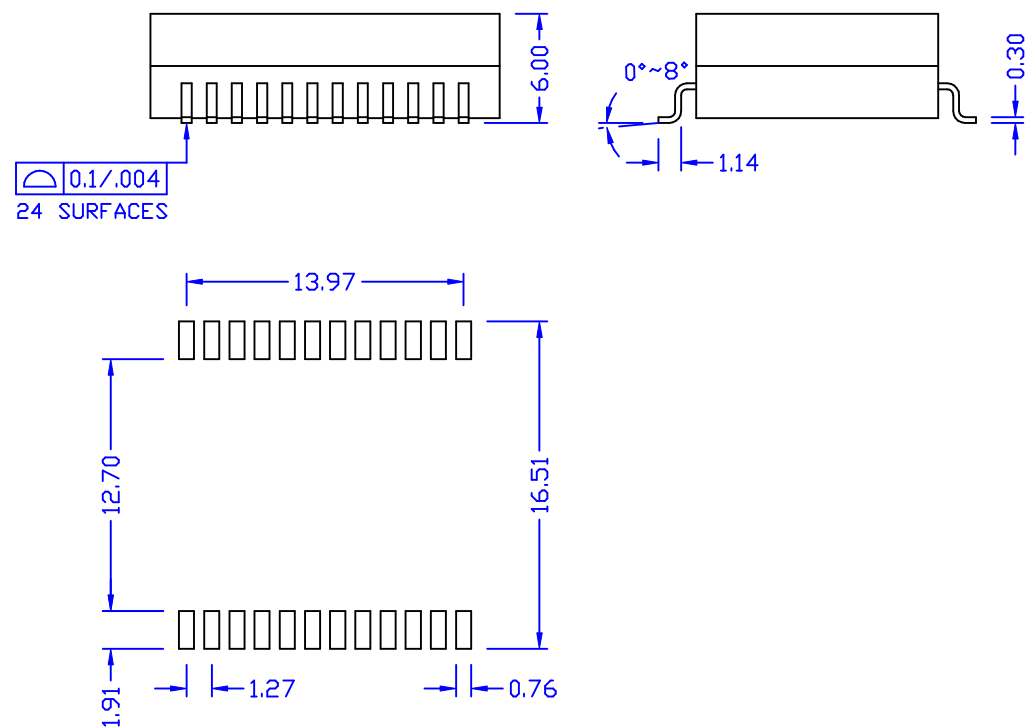

1. TURNS RATIO ($\pm 5\%$) : TX = 1CT : 1CT
RX = 1CT : 1CT
2. OCL (100KHZ/0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. HI-POT : 1500Vrms
4. INSERTION LOSS : 0.1-100MHZ = -1.0dB MAX.
5. CROSS TALK : 30MHZ = -40dB MIN.
60MHZ = -40dB MIN.
80MHZ = -35dB MIN.
6. RETURN LOSS : 30MHZ = -16dB MIN.
60MHZ = -12dB MIN.
80MHZ = -12dB MIN.
7. DCMRR : 30MHZ = -42dB MIN.
60MHZ = -37dB MIN.
100MHZ = -33dB MIN.
8. RoHS COMPLIANCE

						 Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 10/100 BASE-T TRANSFORMER	
							DWG. NO. CLH124000D	
	RELEASE	01/25/2006	PAIR	EUGENE	SUEYD	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						01/25/06		<i>Pair</i>

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm 0,25$