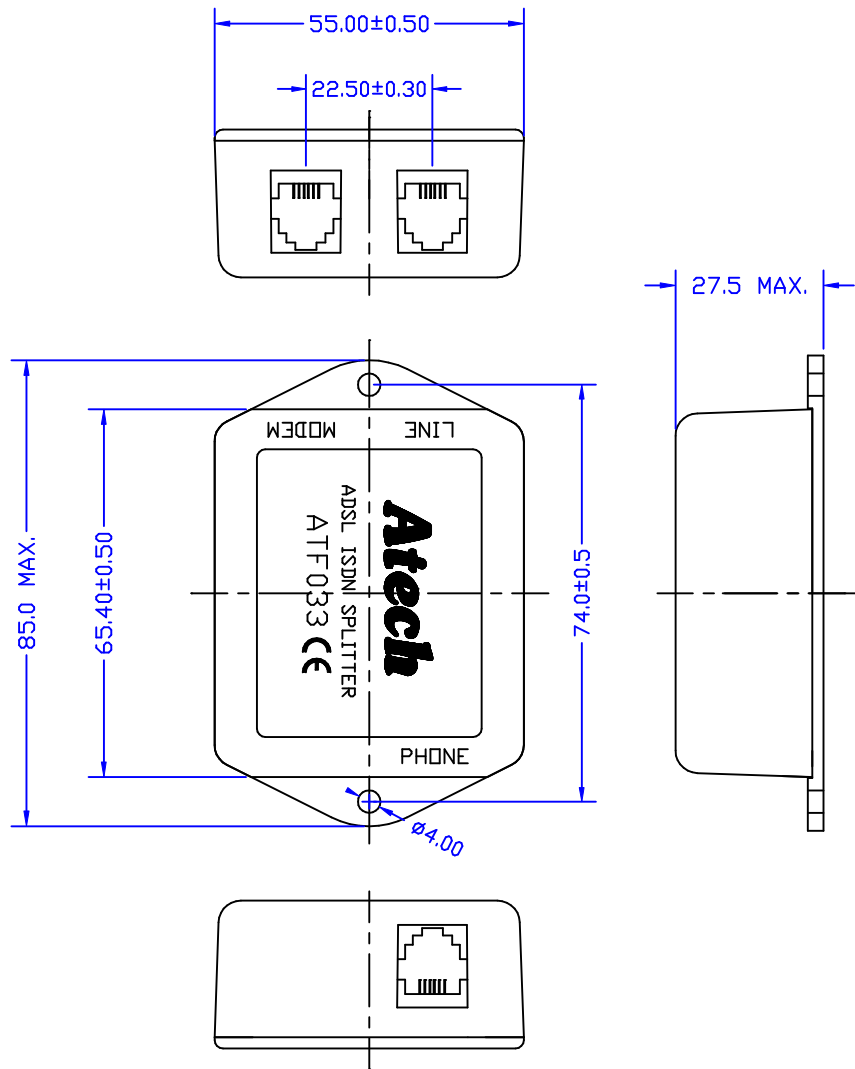


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. TIP TO RING DC VOLTAGE : 0-72V
3. LINE CURRENT : 0-100mA
4. ISDN SPLITTER BANDWIDTH : DC TO 80KHZ
5. ISDN PORT IMPEDANCE : 135 OHM
6. INSERTION LOSS (@200HZ~80KHZ) : 2dB MAX.
7. ATTENUATION :
 - <@160KHZ~1104KHZ> : 60dB MIN.
 - <@1.1MHzHZ~2.2MHz> : 55dB MIN.
8. DELAY DISTORTION (@100HZ~80KHZ) : 200uSEC MAX.
9. RETURN LOSS (@1KHZ~60KHZ) : 16dB MIN.
 - <@60KHZ~80KHZ> : 10dB MIN.
10. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE		ADSL ISDN SPLITTER	
								DWG. NO.		CSA113500A	
	RELEASE	01/20/2006	PAIR	EUGENE	SUEDY	UNITS: M/M		SAFETY		SHEET 1 of 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/20/06				DRAW <i>Pair</i>	
REVISIONS											