

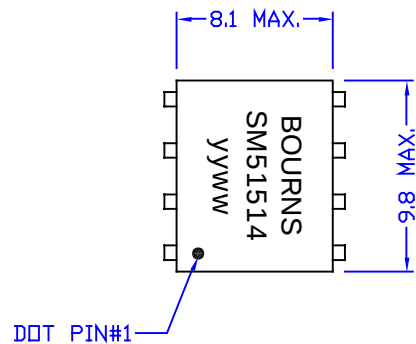


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 1.5 OHM MAX.(2+3)
PIN 5-8 = 1.5 OHM MAX.(6+7)
- INDUCTANCE (@10KHZ, 0.1 Vrms) :
PIN 1-4 (2-3 SHORT) = 750uH ± 7%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-7, 6-8 SHORT) = 10uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 20 pF MAX.
- THD (@25KHZ, 5Vrms) :
PIN 1-4 (2-3, 6-7 SHORT, 8-5 W/H 110 OHM) = -80 dB MAX.
- TURN RATIO (@30KHZ, 1Vrms) :
PIN 1-4 : 8-5 (2-3, 6-7 SHORT) = 0.95 ± 1%.
- HI-POT (@1500VAC, 1mA, 2S) : P-S

						Atech®		TITLE	ADSL LINE TRANSFORMER
						Atech Technology Co., Ltd.		DWG. No.	SM51514
						TEL:02)2794-6667 FAX:02)2794-8004			
RELEASE		06/14/2004	BART	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	06/14/04		Pair