


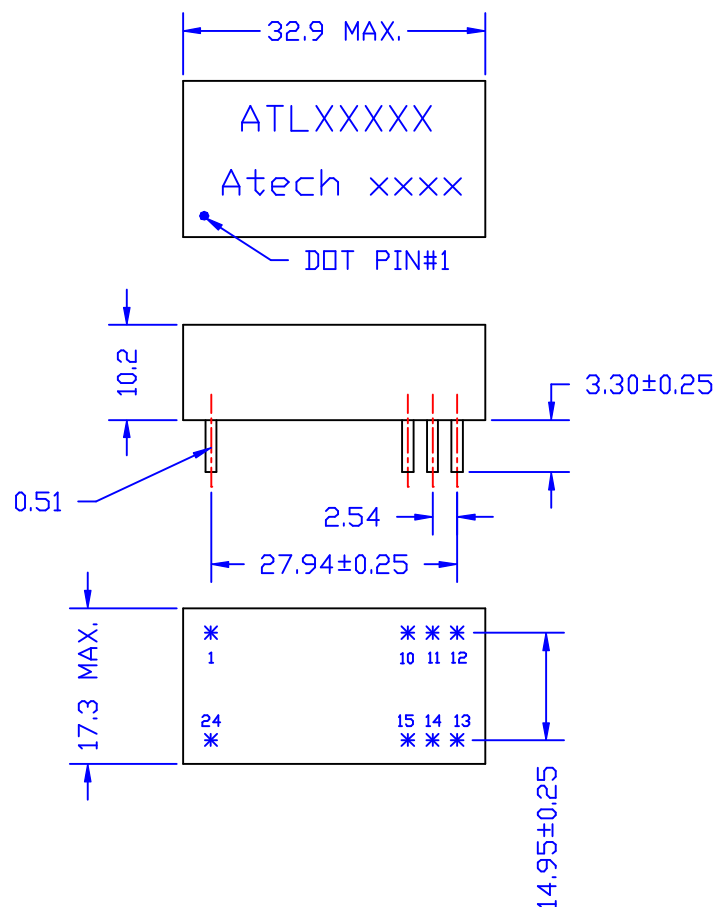

PIN	FUNCTION
1 & 24	+Vin
10 & 15	-Vout
11 & 14	+Vout
12 & 13	-Vin

FEATURES

1. MEET IEEE 802.3 10 BASE 2, 10 BASE 5 COMPATIBLE.
2. INPUT/OUTPUT ISOLATION 500 Vdc.
3. 100% BURN-IN, TESTED THREE TIMES.

SPECIFICATIONS:

1. EFFICIENCY : UNREGULATED 70 - 80%.
2. OUTPUT RIPPLE & NOISE : 0.5 - 1% P-P MAX.
3. LOAD REGULATION: ±12% ; LINE REGULATION : ±8%
4. OPERATING TEMPERATURE : 0° TO 70°C
5. STORAGE TEMPERATURE : -25°C TO 100°C

MODEL NO	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	REGULATED	ISOLATION (Vrms)
ATL05U09	5±0.25	9±5%	200 mA	NO	500
ATL05R09	5±0.25	9±3%	200 mA	YES	500
ATL12U09	12±0.6	9±5%	200 mA	NO	500
ATL12R09	12±0.6	9±3%	200 mA	YES	500

E	PIN PITCH = 14.95±0.25	08/25/2003	RORY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	LAN DC/DC CONVERTER
D	H = 10.2	06/25/2003	RORY	AL	SUEDY		DWG. NO.	ATLXXXXX
C	LOAD 12%, LINE 8%	07/15/2002	DOLLY	AL	SUEDY			
	RELEASE		PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						04/18/97		Pair