
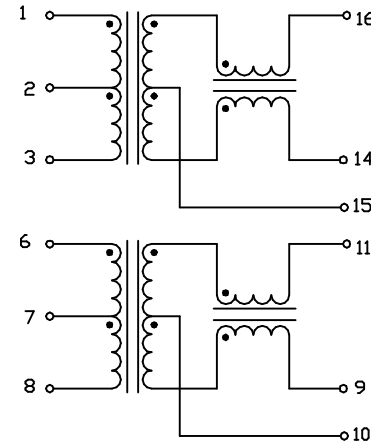
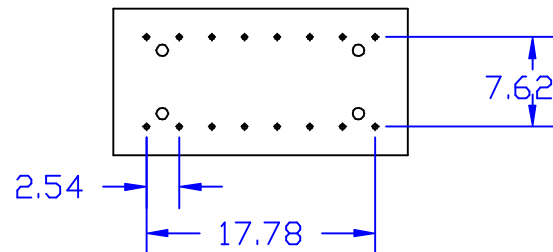
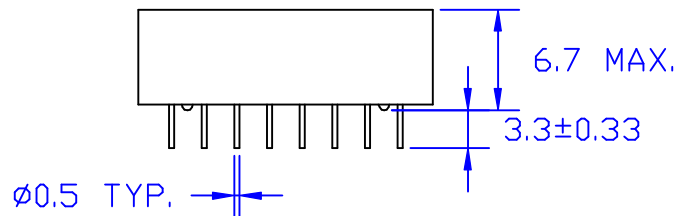


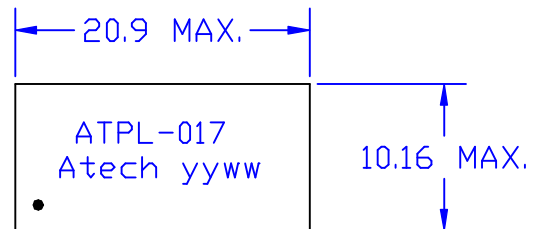

ELECTRICAL CHARACTERISTICS: (PE-65263, COMPATIBLE)

1. D.C.R. : PRI. = 0.3 OHMS MAX.
2. INDUCTANCE PRI (@100KHZ 50mV) :140uH MIN.
3. LEACKAGE INDUCTANCE (@100KHZ, 50mV) PRI : 0.3uH MAX.
4. Cw/w (@100KHZ, 50mV) :10pF MAX.
5. INSERTION LOSS (@1-10MHZ) : -0.5dB MAX.
6. RISE TIME : 3ns MAX.
7. ET-CONSTANCE : 3.5V-US MAX.
8. TURN RATIO : 1CT : 1CT
9. ISOLATION VOLTAGE : 1500Vrms MIN.

C	H = 6.7 MAX.	08/31/2001	DOLLY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 10 BASE-T TRANSFORMER
B	PIN = 3.3 ± 0.3	05/03/99	PAIR		SUEDY		DWG. NO.
A	PIN = 3.0 ± 0.35	04/22/99	PAIR		SUEDY		ATPL-017
	RELEASE	08/13/98	PAIR		SUEDY	UNITS: M/M	SAFETY
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						08/13/98	SHEET 1 OF 1
							DRAW <i>Pair</i>