



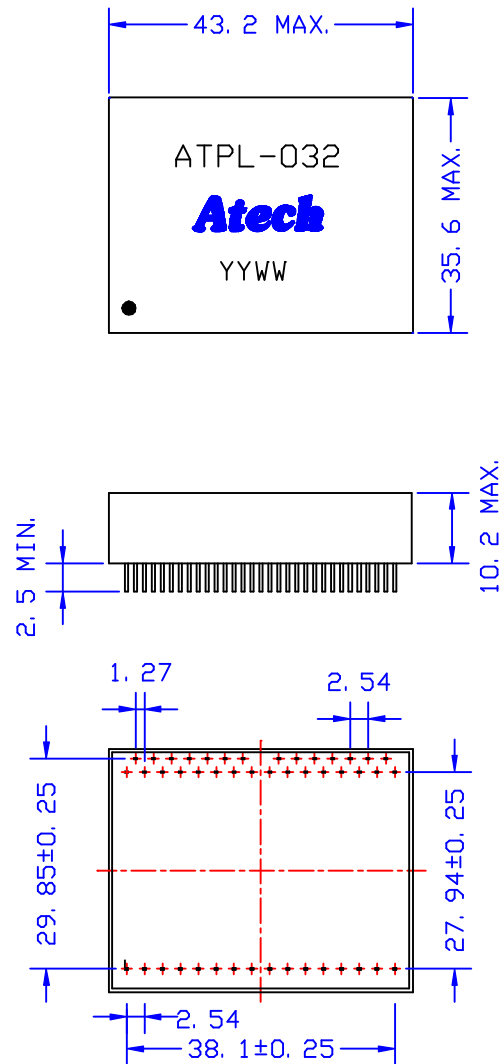

PIN16 REMOVED

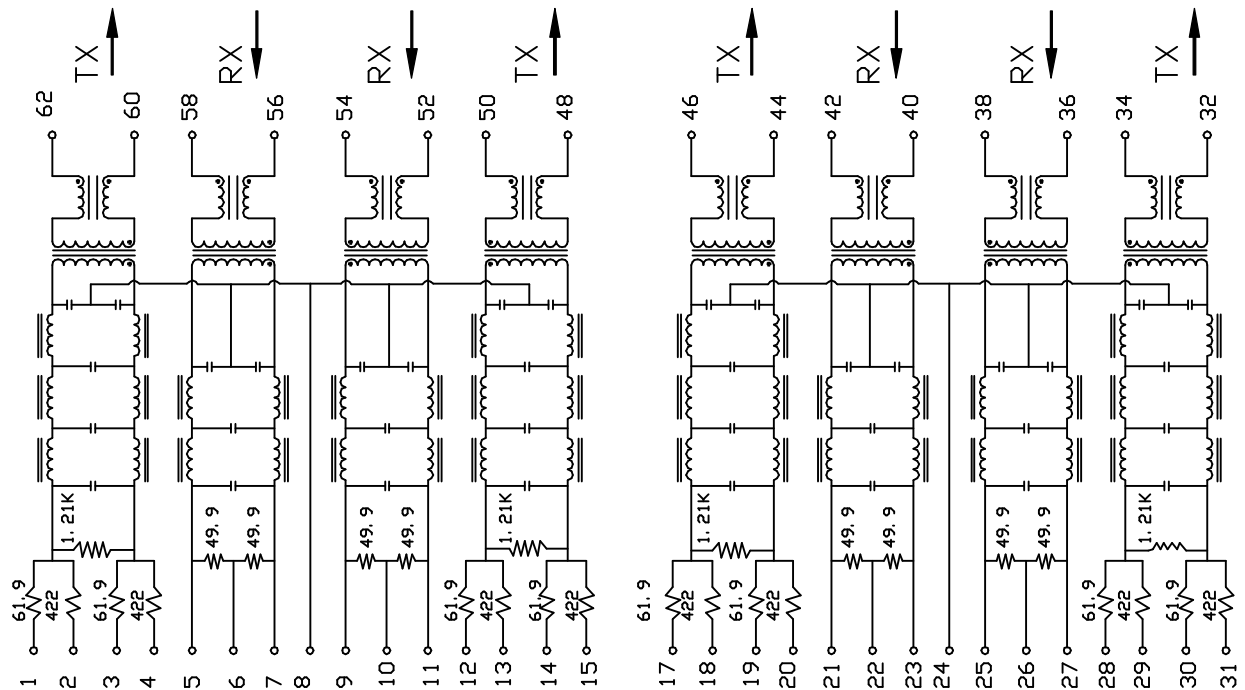

ELECTRICAL CHARACTERISTICS : (FL1057-002 COMPATIBLE)

1. INSERTION LOSS(@1-10MHZ) : -1.0 dB MAX.
2. ATTENUATION :
 - @20MHZ = -7dB MIN. (TX), -5dB MIN. (RX)
 - @25MHZ = -18dB MIN. (TX), -11dB MIN. (RX)
 - @30MHZ = -30dB MIN. (TX), -16dB MIN. (RX)
 - @40MHZ = -33DB MIN. (TX), -26dB MIN. (RX)
3. CUT OFF FREQUENCY : 17MHZ TYP.
4. RETURN LOSS (@5-10MHZ) : -15dB MIN.
5. COMMON MODE REJECTION (@30-100MHZ) : -30dB MIN.
6. CROSSTALK(@1-10MHZ) : -35dB MIN.
7. HI-POT(@1500VAC, 1mA, 2SEC) : PRI. -SEC.

						Atech®		TITLE QUAD PORT	
						Atech Technology Co., Ltd.		10/100 BASE-TX	
						TEL:(02)788-1958 FAX:(02)788-1960		DWG. NO.	
								ATPL-032	
RELEASE		12/02/98	PAIR	SUEDY	UNITS:	SAFETY		SHEET1 OF 1	
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						12/02/98		Pair	