
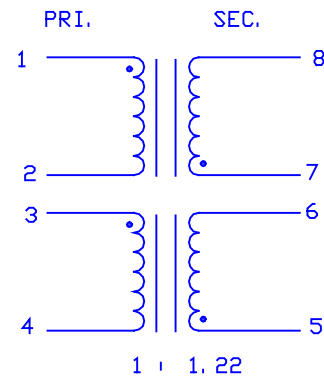
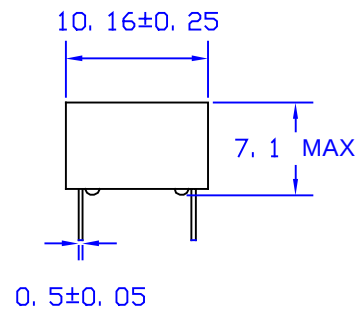


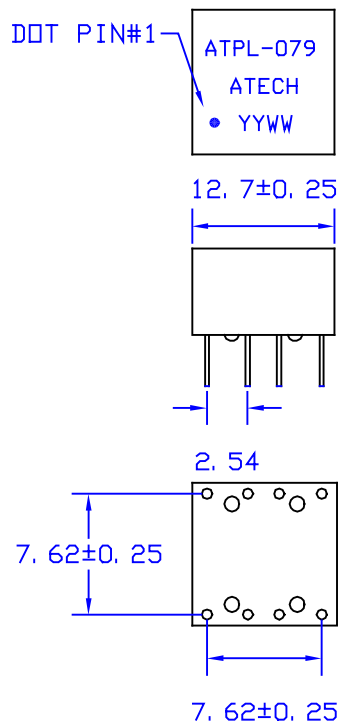

ELECTRICAL CHARACTERISTICS:

1. D. C. R. : 1-2 = 3-4 = 0.4 OHM MAX, 5-6 = 7-8 = 0.8 OHM MAX.
2. INDUCTANCE : (<@100KHZ, 0.2Vrms)
1-2 = 3-4 = 250uH MIN.
3. LEAKAGE : (<@100KHZ, 0.2 Vrms, 5-6, 7-8 SHORT)
1-2 = 3-4 = 0.3uH MIN.
4. INTERWINDING CAP. : (<@100KHZ, 0.2Vrms)
1-8 = 4-5 = 15PF MAX.
5. INSERTION LOSS (@ 1M-20MHZ) : 0.5dB MAX.
6. RETURN LOSS (@1M-20MHZ) : -20dB MIN.
7. TURNS RATIO : PIN 1-2 : PIN 7-8 = 1 : 1.22
PIN 3-4 : PIN 5-6 = 1 : 1.22
8. CROSS TALK (@1M-20MHZ) : -37dB MIN.
9. RISE TIME : 5nSEC. MAX.
10. HI-POT : 500VAC, 1MA, 2SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TOKEN RING TRANSFORMER		
							DWG. NO. ATPL-079		
A	H=7.1 MAX.	06/16 /00	FENG		SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	11/08 /99	PAIR		SUEDY	DATE			DRAW
NO.	DESCRIPTION	DATE	BY	CHK	APPD	11/08/99			<i>Pair</i>
REVISIONS									