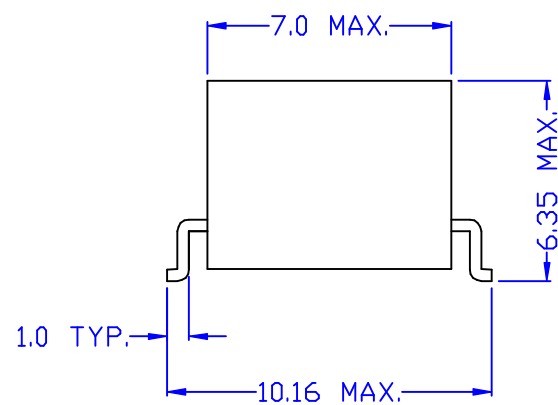
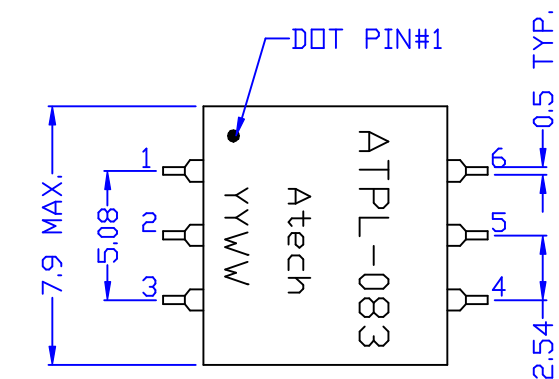


ELECTRICAL CHARACTERISTICS : <TG38-1505NS COMPATIBLE>

1. DCR : PIN 1-3 = 0.9 OHM MAX.
PIN 4-6 = 0.7 OHM MAX.
2. INDUCTANCE (@100KHZ, 50mV) : PIN 4-6 = 1.5mH MIN.
3. LEAKAGE INDUCTANCE (@100KHZ, 50mV, PIN1-3 SHORT) : PIN 4-6 = 0.4uH MAX.
4. CW (@100KHZ, 50mV) : PIN 1-6 = 35pF MAX.
5. TURNS RATIO : 1 : 1.15CT $\pm$ 5% (PRI : SEC)
6. ISOLATION VOLTAGE : 1500Vrms

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. ATPL-083	
	RELEASE	01/11/00	RDRY		SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/11/00			
REVISIONS									