
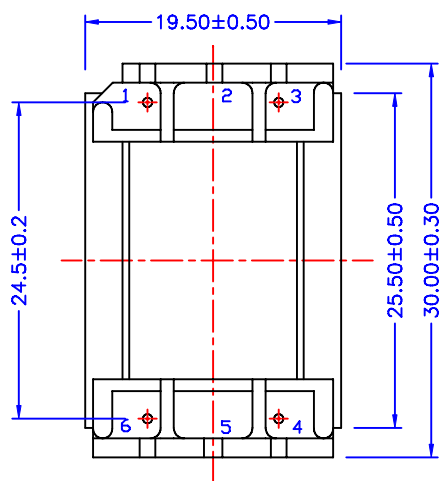
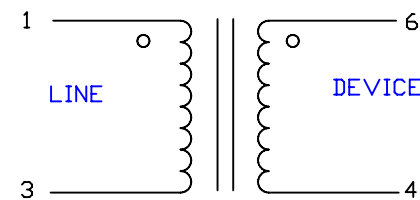
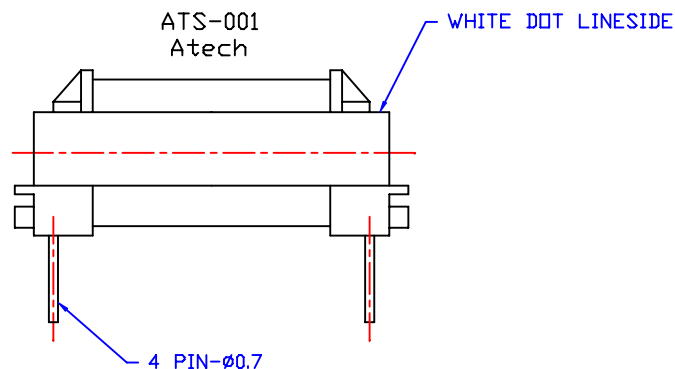


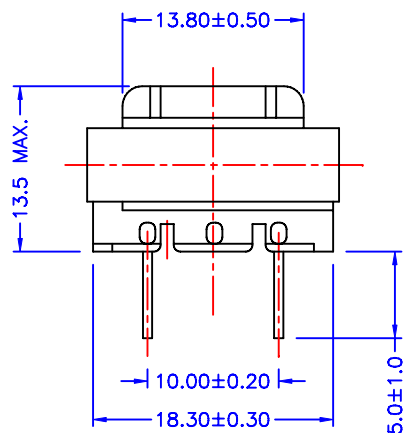

ELECTRICAL CHARACTERISTICS :

- 1 D.C.R. : PIN 1-3 = 78 OHM $\pm$ 15%
PIN 4-6 = 105 OHM $\pm$ 15%
- 2 INDUCTANCE : (AT 1KHZ, 1Vrms) PIN 1-3 = 400mH MIN. (W/O DC)
PIN 1-3 = 200mH MIN. (W/H 80mA DC)
- 3 IMPEDANCE = 600 OHM $\pm$ 15%
(AT 1KHZ, 1Vrms, 0-80mA DC, PIN 4-6 W/H 600 OHM)
- 4 INSERTION LOSS = 1.7db MAX. (AT 1KHZ, 1Vrms, W/H 600 OHM LOAD)
- 5 FREQ. RESP. = $\pm$ 0.5db (300HZ -3.4KHZ, REF. TO 1KHZ)
- 6 RETURN LOSS : ERL = 14db MIN.
SRL-LO = 8db MIN.
SRL-HI = 16db MIN.
- 7 LOGITUDINAL BALANCE = 60db MIN. (AT 1KHZ)
LOGITUDINAL BALANCE = 60db MIN. (AT 3.4KHZ)
- 8 HI-POT = 1500VAC, 1mA, 1MINUTE (PRI-SEC-CORE)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-001	
A	DELET or MARK	10/31/2006	PAIR	WILLIE	EUGENE			
	RELEASE	10/31/2006	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						10/31/06	CTP219005A	<i>Pair</i>