

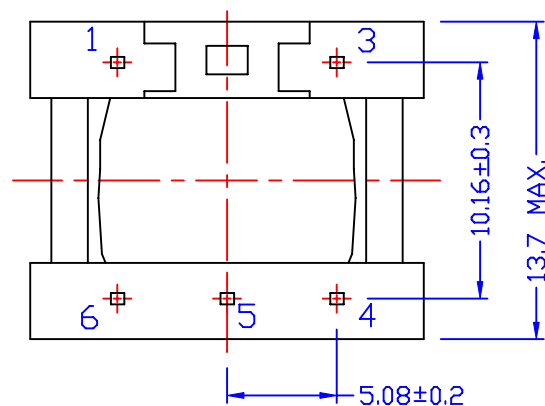


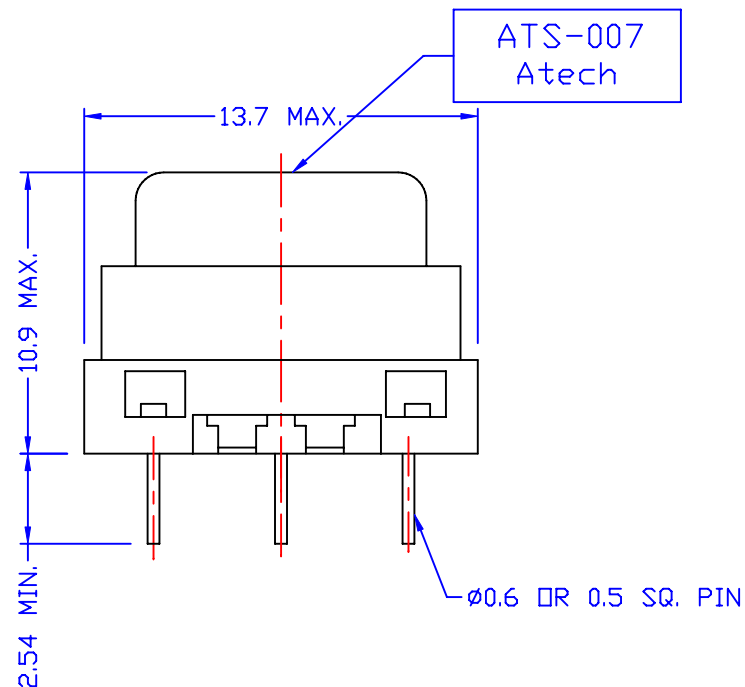

BOTTOM VIEW

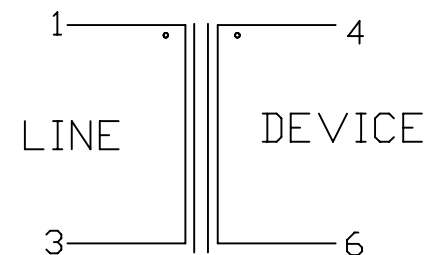

ELECTRICAL CHARACTERISTICS : <671-8240 COMPATIBLE>

1. D.C.R. : PIN 1-3 = 55 OHM $\pm$ 15%
PIN 4-6 = 65 OHM $\pm$ 15%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 600mH MIN.
3. Q (@1KHZ, 1Vrms) : PIN 1-3 = 1.1 MIN.
4. IMPEDANCE = 600 OHM $\pm$ 15%
5. INSERTION LOSS = 1.3db MAX. (AT 1KHZ, 1V)
6. FREQ. RESP = $\pm$ 0.5db (REF. TO 1KHZ) AT 300HZ TO 4KHZ
7. RETURN LOSS = @300HZ = 18db MIN.
@1KHZ = 21db MIN.
@3.4KHZ = 20db MIN.
8. TURN RATIO = 1 : 1 $\pm$ 1%
9. POLARITY = PIN 1-4 INPHASE
10. LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
11. LEVEL TRACKING (@300HZ, 4Vrms, 4-6 W/H 600 OHM LOAD)
PIN 1-3 = 400 OHM MIN.
12. HI-POT = 3750VAC, 1 MINUTE (PRI.-SEC. ONLY)

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
B	DELET UL MARK	10/31/2006	PAIR	WILLIE	EUGENE		DWG. NO. ATS-007	
A	Ø0.6 OR 0.5SQ. PIN	09/28/98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE	P/N: CTP028000A	DRAW <i>Pair</i>
REVISIONS								