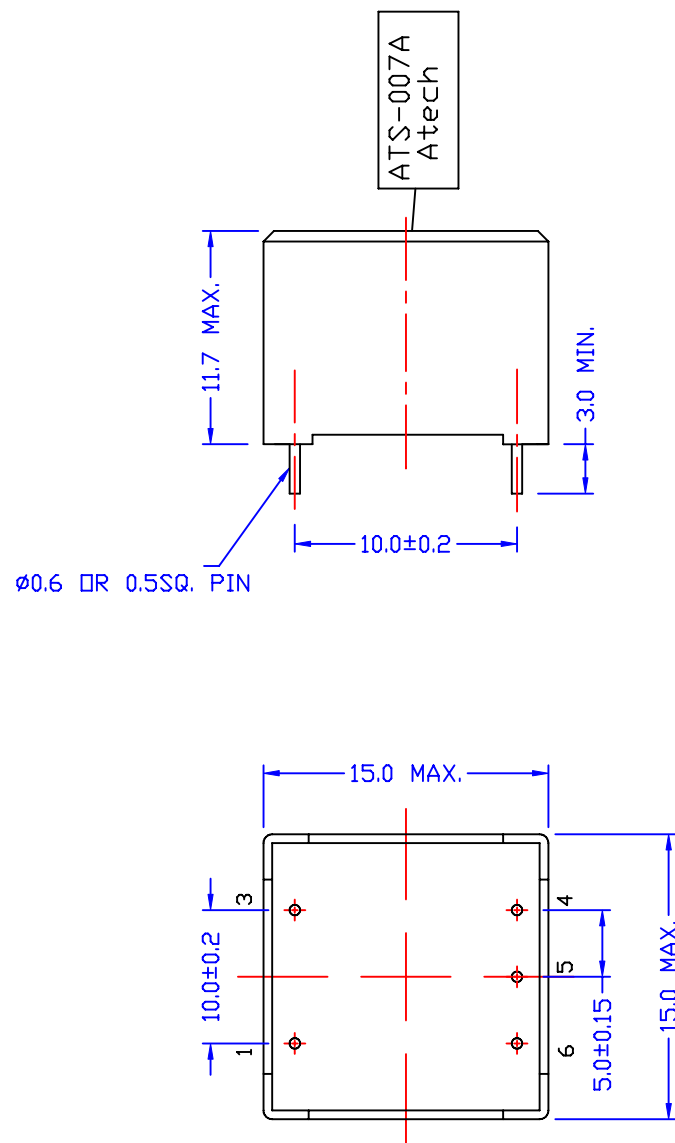


ELECTRICAL CHARACTERISTICS : <671-8240 COMPATIBLE>

- DCR : PIN 1-3 = 55 OHM $\pm$ 15%
PIN 4-6 = 65 OHM $\pm$ 15%
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 600mH MIN.
- Q (@1KHZ, 1Vrms) : PIN 1-3 = 1.1 MIN.
- IMPEDANCE = 600 OHM $\pm$ 15%
- INSERTION LOSS = 1.3db MAX. (AT 1KHZ, 1V)
- FREQ. RESP = $\pm$ 0.5db (REF. TO 1KHZ) AT 300HZ TO 4KHZ
- RETURN LOSS = @300HZ = 18db MIN.
@1KHZ = 21db MIN.
@3.4KHZ = 20db MIN.
- TURN RATIO = 1 : 1 $\pm$ 1%
- POLARITY = PIN 1-4 INPHASE
- LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
- LEVEL TRACKING (@300HZ, 4Vrms, 4-6 W/H 600 OHM LOAD)
PIN 1-3 = 400 OHM MIN.
- HI-POT = 3750VAC, 1MINUTE (PRI.-SEC. ONLY)

c	DELETE UL & FI MARK	07/16/2007	PAIR	WILLIE	SUEDY	Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	600 : 600 TRANSFORMER
B	H = 11.7 MAX.	11/23/2004	BART	AL	SUEDY		DWG. NO.	ATS-007A
A	Ø0.6 OR 0.5 SQ. PIN	03/31/98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair