

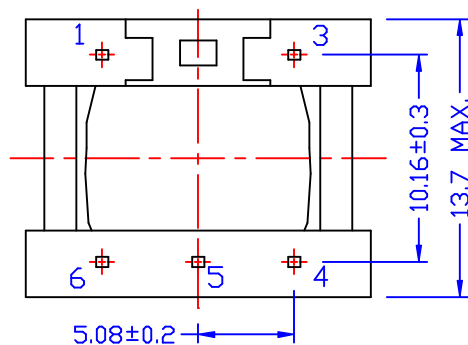


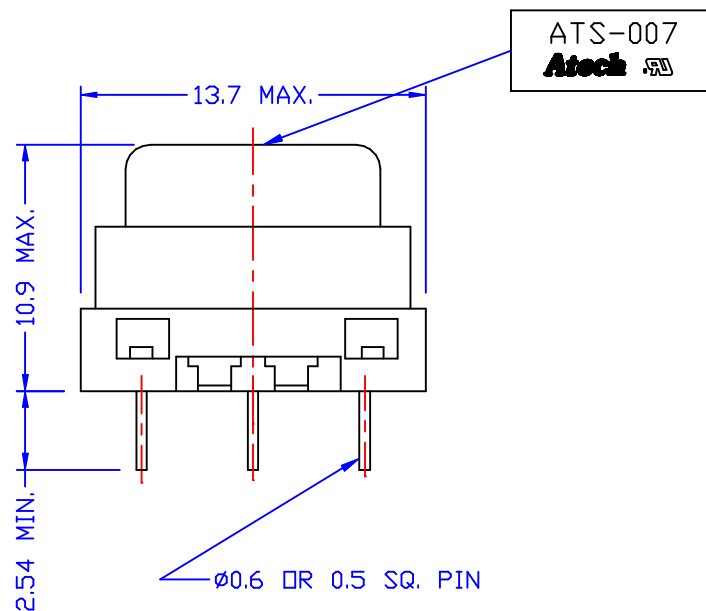

BOTTOM VIEW

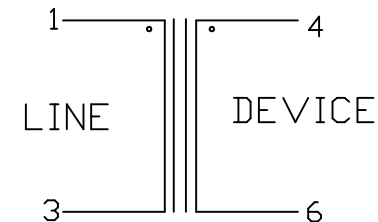

ELECTRICAL CHARACTERISTICS : <671-8240 COMPATIBLE>

1. D.C.R. PIN 1-3 = 55 OHM $\pm$ 15%
PIN 4-6 = 65 OHM $\pm$ 15%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 600mH MIN.
3. Q (@1KHZ, 1Vrms) : PIN 1-3 = 1.1 MIN.
4. IMPEDANCE = 600 OHM $\pm$ 15%
5. INSERTION LOSS = 1.3db MAX. (AT 1KHZ, 1V)
6. FREQ. RESP = $\pm$ 0.5db (REF. TO 1KHZ) AT 300HZ TO 4KHZ
7. RETURN LOSS = @300HZ = 18db MIN.
@1KHZ = 21db MIN.
@3.4KHZ = 20db MIN.
8. TURN RATIO = 1 : 1 $\pm$ 1%
9. POLARITY = PIN 1-4 INPHASE
10. LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
11. LEVEL TRACKING (@300HZ, 4Vrms, 4-6 W/H 600 OHM LOAD)
PIN 1-3 = 400 OHM MIN.
12. HI-POT = 3750VAC, 1MINUTE (PRI.-SEC. ONLY)

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATS-007B
	RELEASE	11/30/98	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	11/30/98	DRAW
						E159603		 Pair