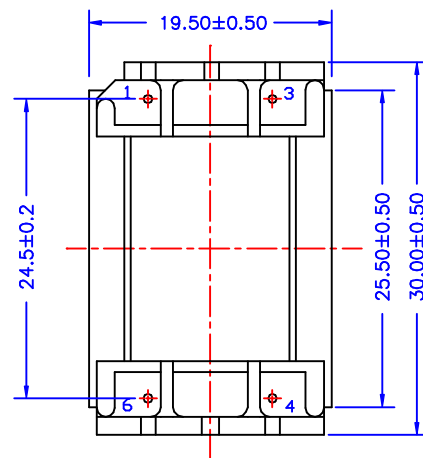
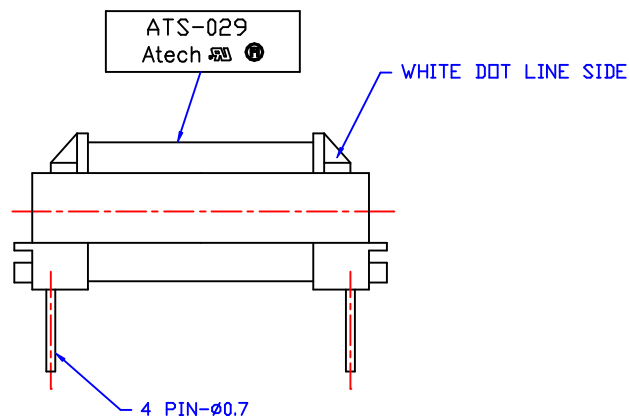
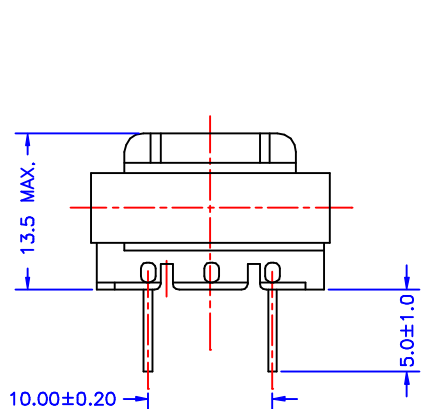


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 160 OHM MAX.
PIN 4-6 = 150 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms W/H 80 mA DC) : PIN 1-3 = 240mH MIN.
3. IMPEDANCE (@1KHZ, 1Vrms W/H 80 mA DC PIN 4-6 W/H 600 OHM) :
PIN 1-3 = 600 OHM ± 10%
PIN 4-6 = 600 OHM ± 10%
4. INSERTION LOSS (@1KHZ 1Vrms W/H 80 mA DC PIN 4-6 W/H 600 OHM) = 2.5dB MAX.
5. F/R (REF. 1KHZ) : @300HZ = ± 1.5dB
@3400HZ = ± 0.5dB
6. RETURN LOSS (W/H 80 mADC) : @300HZ = 10.0dB MIN.
@1KHZ = 17.5dB MIN.
@3.4KHZ = 17.5dB MIN.
7. POLARITY 1 & 6
8. HI-PDT (@3750V, 1mA 1MINUTE) : PRI-SEC

						Atech®		TITLE TRANSFORMER		
A	R/L	01/30/2002	DOLLY	AL	SUEDY	Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		DWG. NO. ATS-029		
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY FI 504		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	E159603			
REVISIONS										DRAW <i>Pair</i>