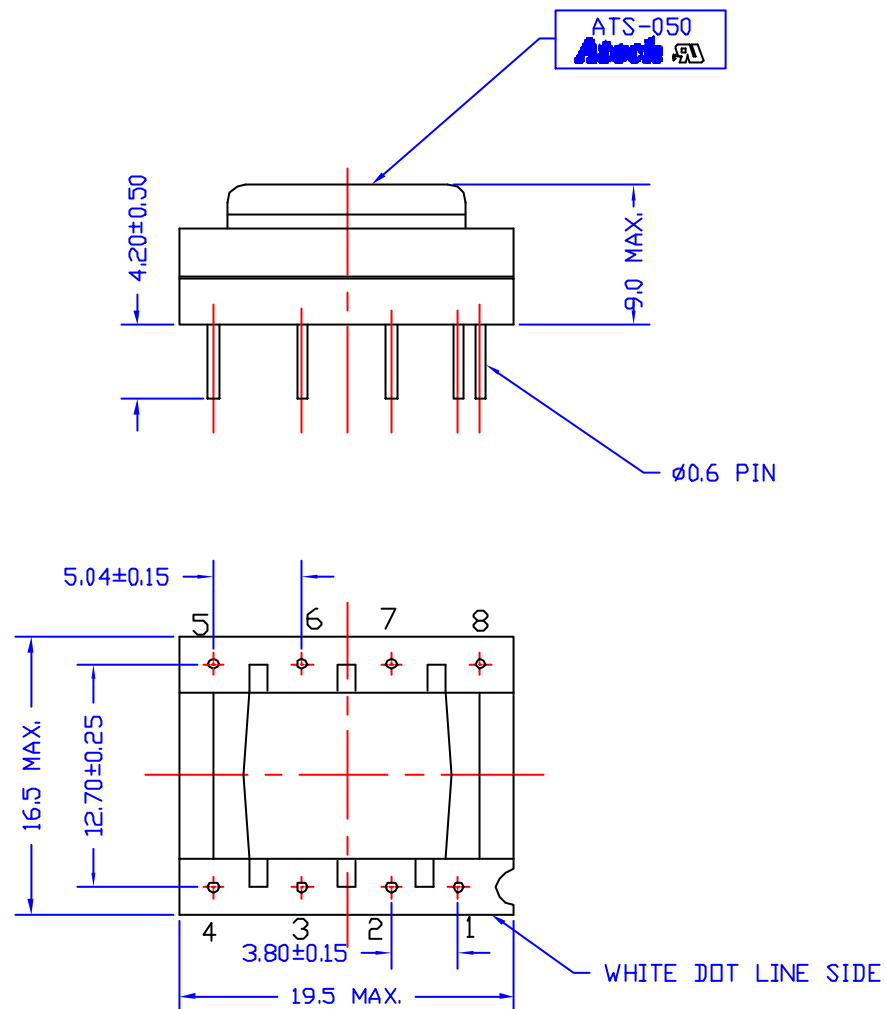


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 2-3 = 120 OHM MAX.
PIN 6-7 = 170 OHM MAX.
- 2 INDUCTANCE (@1KHZ, 1Vrms, W/H 80mADC) : PIN 2-3 = 130mH MIN.
- 3 IMPEDANCE (@1KHZ, 1Vrms, W/H 80mADC, PIN 6-7 W/H 600 OHM LOAD) :
PIN 2-3 = 600 OHM ± 10%
= 3.2dB MAX.
- 4 INSERTION LOSS (@1KHZ, 1Vrms, W/H 80mADC PIN 6-7 W/H 600 OHM LOAD)
= 3.2dB MAX.
- 5 FREQ. RESP (@REF. 1KHZ) : @300HZ = ± 3.5dB
@3.4KHZ = ± 1dB
- 6 RETURN LOSS : @300HZ = 6dB MIN. (W/H 80 mADC)
- 7 LOGITUDINAL BALANCE = 60dB MIN (AT 1KHZ)
LOGITUDINAL BALANCE = 60dB MIN (AT 3.4KHZ)
- 8 HI-POT (@1500VAC, 1mA 1MINUTE) : PRI.- SEC.

						Atech®		TITLE: 600 : 600 WET TRANSFORMER	
B	SCHEMATIC	05/06/2005	BART	AL	SUEBY	Atech Technology Co. Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8084		DWG. NO.	ATS-050
A	H = 9.0 MAX.								
	RELEASE		PAIR		SUEBY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APP'D	DATE	E159603 		DRAW <i>Pair</i>
REVISIONS									