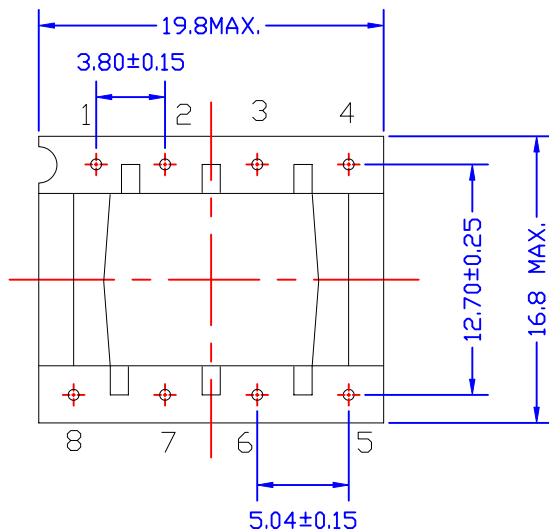
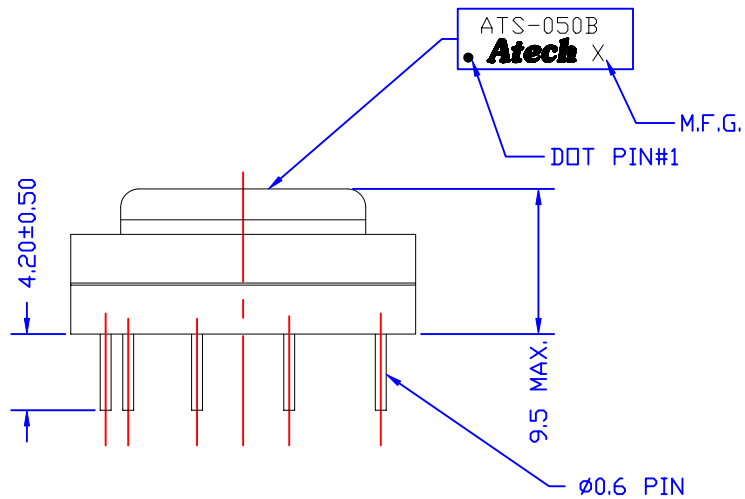


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 2-3 = 127 OHM MAX.
PIN 6-7 = 254 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms, W/H 80 mADC) :
PIN 2-3 = 130 mH MIN.
- IMPEDANCE (@650HZ, 1Vrms, W/H 80 mADC,
PIN 6-7 W/H 600 OHM LOAD) :
PIN 2-3 = 600 OHM %10%.
- INSERTION LOSS (@1KHZ, 1Vrms, W/H 80 mADC,
PIN 6-7 W/H 600 OHM LOAD) : 3.2 dB MAX.
- FREQUENCY RESPONSE (REF. 1KHZ) :
@300 HZ = ±3.5 dB.
@3.4 KHZ = ±1 dB.
- RETURN LOSS :
@300HZ = 5 dB MIN. W/H 80 mADC.
- LOGITUDINAL BALANCE :
@1KHZ = 60 dB MIN.
@3.4KHZ = 60 dB MIN.
- HI-PDT (@1500VAC, 1mA, 1MIN) : PRI-SCE.
- LEAD FREE.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE: 600 : 600 WET TRANSFORMER	
								DWG. NO. ATS-050BN	
	RELEASE	03/18 /2005	BART	AL	SUE'DY			UNITS: M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY		SHEET 1 OF 1
REVISIONS						03/18/05			DRAW <i>Pair</i>