

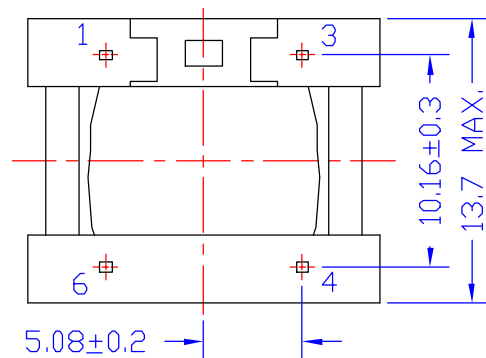


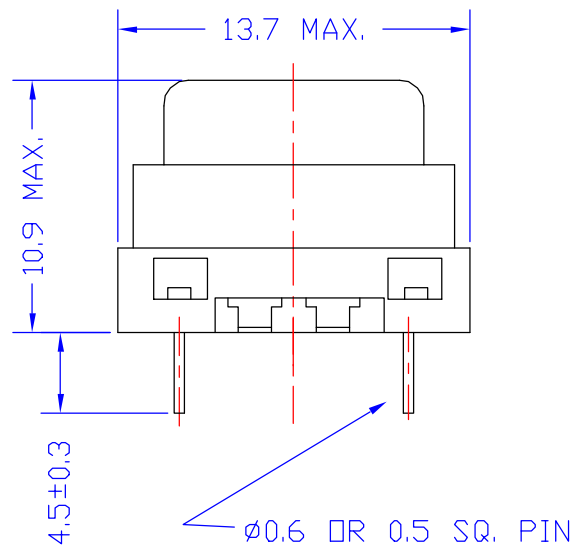

BOTTOM VIEW

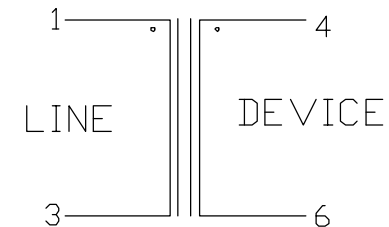

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 53 Ω HM $\pm$ 15%
PIN 4-6 = 38 Ω HM $\pm$ 15%
2. INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 0.9H MIN.
3. IMPEDANCE (@300HZ, 1Vrms 4-6 W/H 300 Ω HM LOAD) :
PIN 1-3 = 600 Ω HM $\pm$ 10%
4. INSERTION LOSS (@1KHZ, 1Vrms 4-6 W/H 300 Ω HM LOAD) :
PIN 1-3 = 1.4dB MAX.
5. RETURN LOSS (REF 600 Ω HM 4-6 W/H 300 Ω HM LOAD) :
@300HZ = 17dB MIN.
@1KHZ = 20dB MIN.
@4KHZ = 20dB MIN.
6. FREQ RESP. (REF 1KHZ) : @300HZ = $\pm$ 0.45
@4KHZ = $\pm$ 0.35
7. HI-POT (@4KVAC, 1mA, 2SEC) : PIN 1-4
8. LEAD-FREE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-070N	
	RELEASE	05/30/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						05/30/05		