
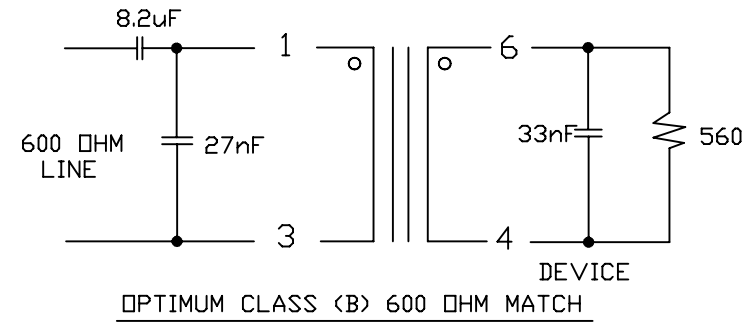
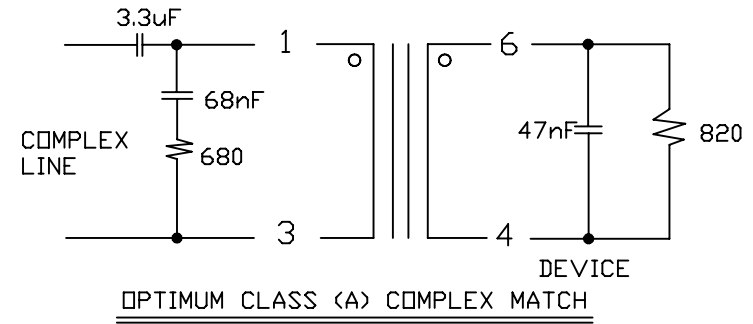
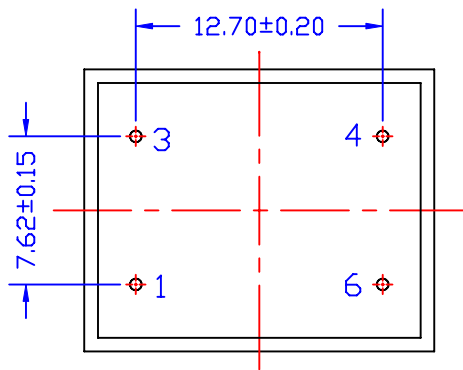
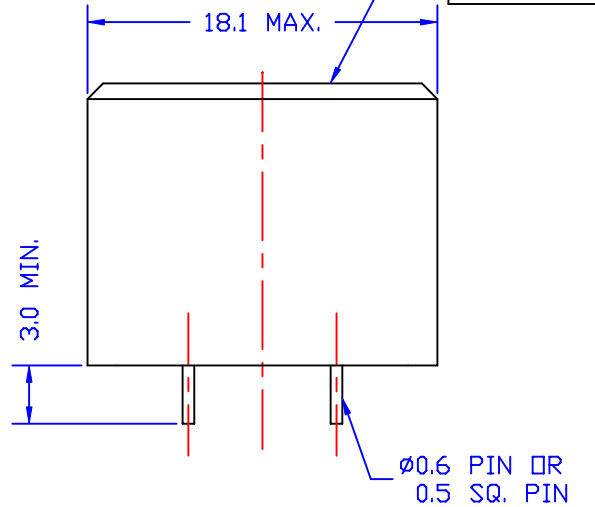


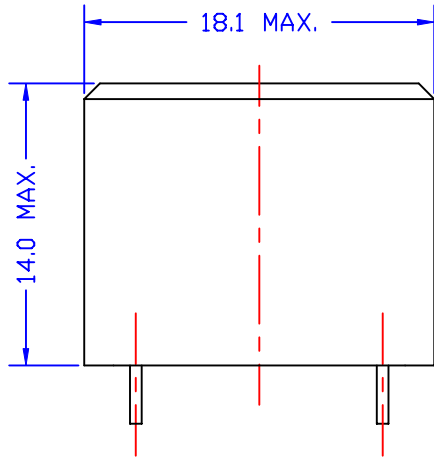

ELECTRICAL CHARACTERISTICS : <COMPATIBLE WITH P1200 FOR V.32bis>

1. D.C.R. : PIN 1-3 = 6-4 = 65 OHM $\pm$ 5%
2. INDUCTANCE (@200HZ, 10mVrms, PARALLEL) : PIN 1-3 = 4.15H MIN.
3. LEAKAGE INDUCTANCE (@200HZ, 10mVrms, SERIES) : PIN 1-3 = 20mH MAX.
4. RETURN LOSS : (REF. 600 OHM) 300 TO 4KHZ = 21dB MIN.
5. INSERTION LOSS : (@1KHZ, 1Vrms) 1.3dB MAX.
6. FREQ. RESPONSE : (REF. 1KHZ) 300 TO 4KHZ = $\pm$ 0.5dB
7. TURN RATIO : (@6KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. DISTORTION : 300HZ, 0dbm : -77dB MAX.
9. HI-POT : (3750VAC, 1mA, 1MIN.) PIN 1-6
10. LEAD-FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-079N	
A	SPEC.	10/19/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	11/19/2004	PAIR	AL	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/19/04		