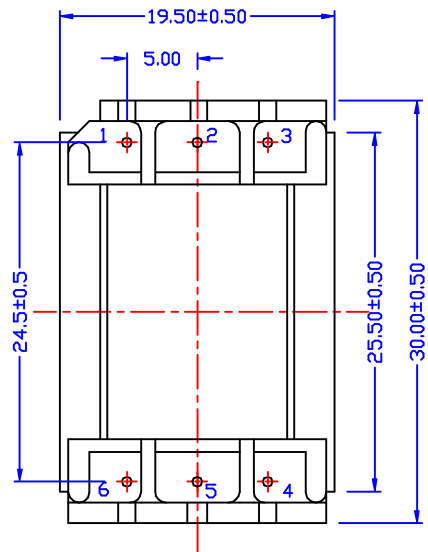
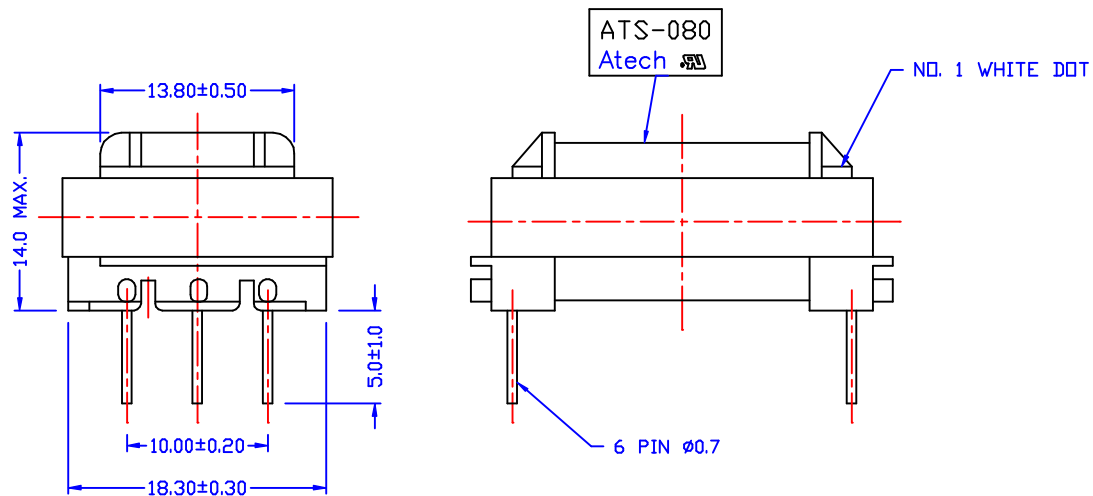


ELECTRICAL CHARACTERISTICS : (671-1561 COMPATIBLE)

1. IMPEDANCE : (@1KHZ 1Vrms PIN 2-6 SHORT W/H 90mADC PIN 3-4 W/H 525 OHM LOAD)
PIN 1-5 = 600 OHM $\pm$ 10%
2. D.C.R. : PIN 1-5 (W/H PIN 2-6 SHORT) = 75 OHM $\pm$ 15%
PIN 3-4 = 100 OHM $\pm$ 15%
3. INSERTION LOSS (@1KZ 1Vrms PIN 2-6 SHORT W/H 90mADC PIN 3-4 W/H 525 OHM LOAD)
PIN 1-5 = 1.6 dB MAX.
4. FREQ. RESP. (REF. 1KHZ) : @300HZ = $\pm$ 1.8dB
@600HZ = $\pm$ 0.5dB
@4KHZ = $\pm$ 0.3dB
5. RETURN LOSS (REF. 600 OHM) : @300HZ = 7.5dB MIN.
@1KHZ = 15dB MIN.
@4KHZ = 15dB MIN.
6. LOGITUDINAL BALANCE : @300-1KHZ = 70dB MIN.
@1K-4KHZ = 60dB MIN.
7. HI-POT (@1500VAC, 60HZ, 1mA, 1MINUTE) : PRI-SEC

						Atech®		TITLE
B	H = 14.0 MAX.	05/05/2003	RORY	AL	SUEDY	Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TRANSFORMER
A	24.5±0.5	11/12/2002	DOLLY	AL	SUEDY			DWG. NO. ATS-080
RELEASE						UNITS:	SAFETY	SHEET 1 OF 1
NO: DESCRIPTION DATE BY CHK APPD						M/M		
REVISIONS						DATE	E159603 CA	DRAW <i>Pair</i>