
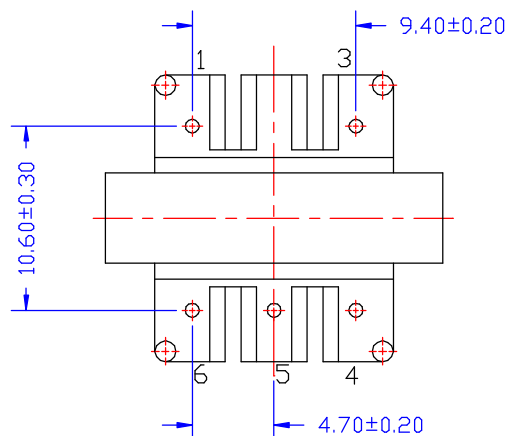

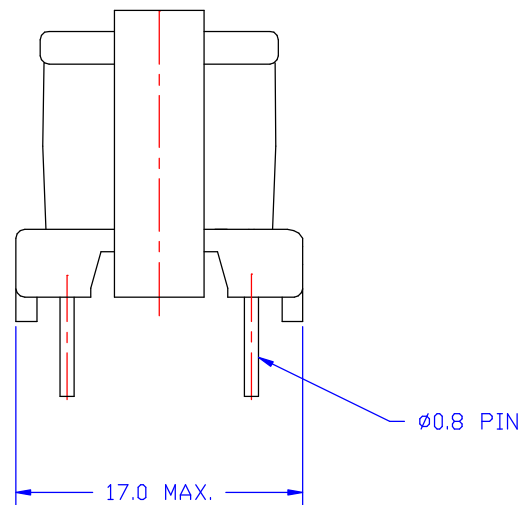


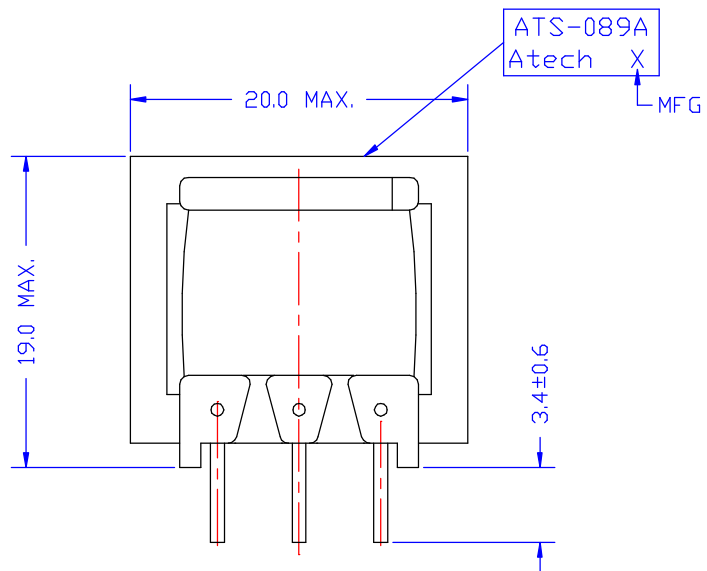

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-3 = 500 Ω M $\pm$ 10% PIN 4-6 = 675 Ω M $\pm$ 10%
- 2 INDUCTANCE : (<@1KHZ, 1Vrms) PIN 1-3 = 18Hy MIN.
- 3 IMPEDANCE : (<@1KHZ, 1Vrms, PIN 4-6 W/H 20K Ω M)
PIN 1-3 = 20K Ω M $\pm$ 5%
= 1.0 dB MAX.
- 4 INSERTION LOSS :(<@1KHZ, 1Vrms, PIN 4-6 W/H 20K Ω M)
- 5 FREQ RESP : (REF. 1KHZ) @300HZ = $\pm$ 0.2 dB
@4KHZ = $\pm$ 0.2 dB
- 6 HI-POT : (<@1500VAC, 1mA, 1 MINUTE) PIN 1-4 , PIN 1-CORE

					Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 20K : 20KCT TRANSFORMER	
							DWG. NO. ATS-089A	
	RELEASE	05/03/2004	PAIR	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						05/03/04		