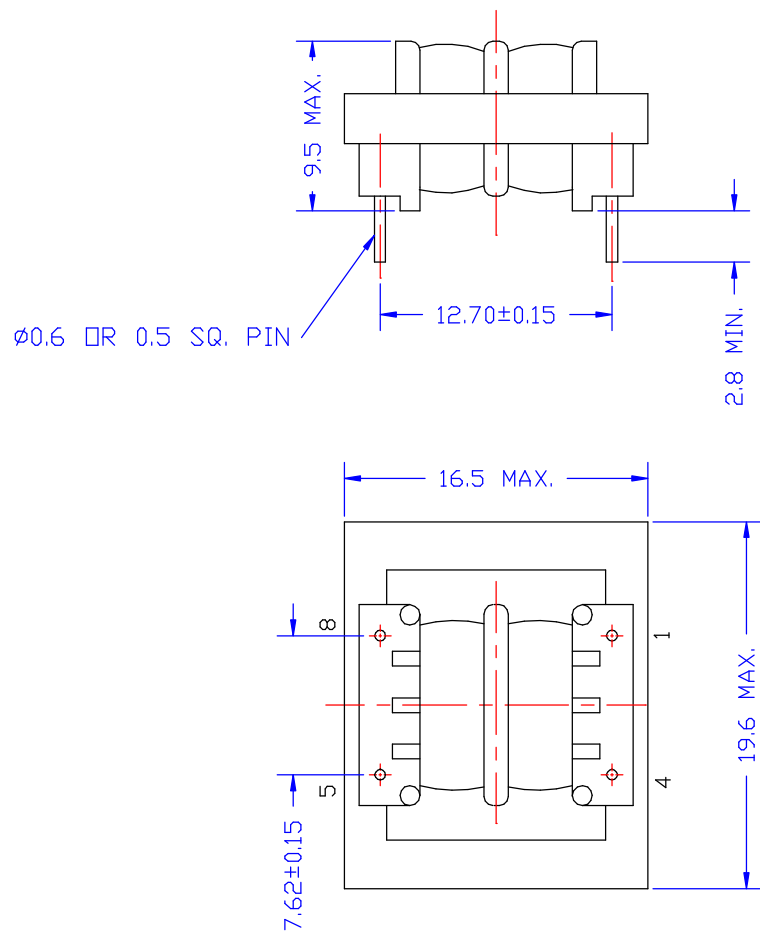


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN1-4 = 1200 Ω HM MAX. PIN 5-8 = 1200 Ω HM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) PIN 1-4 = 12.5H MIN.
3. IMPEDANCE (@300HZ - 4KHZ, 1Vrms, 5-8 W/H 20K Ω HM)
PIN 1-4 = 20K Ω HM +/- 10%
4. INSERTION LOSS (@1KHZ, 1Vrms, 5-8 W/H 20K Ω HM)
= 1.5dB MAX.
5. HI-POT (@3750VAC, 1mA, 1MINUTE) PRI.-SEC.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE 20K : 20K TRANSFORMER	
								DWG. NO. ATS-090B	
	RELEASE	07/11/2003	RORY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						07/11/03			