
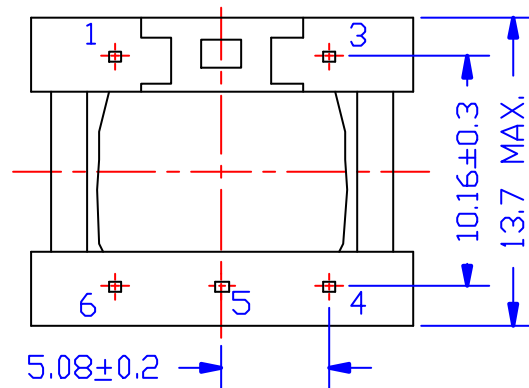
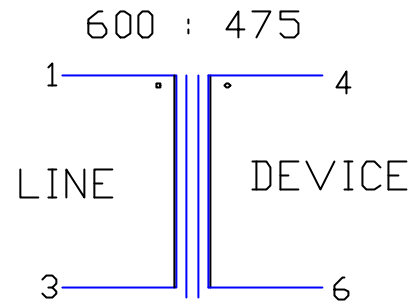


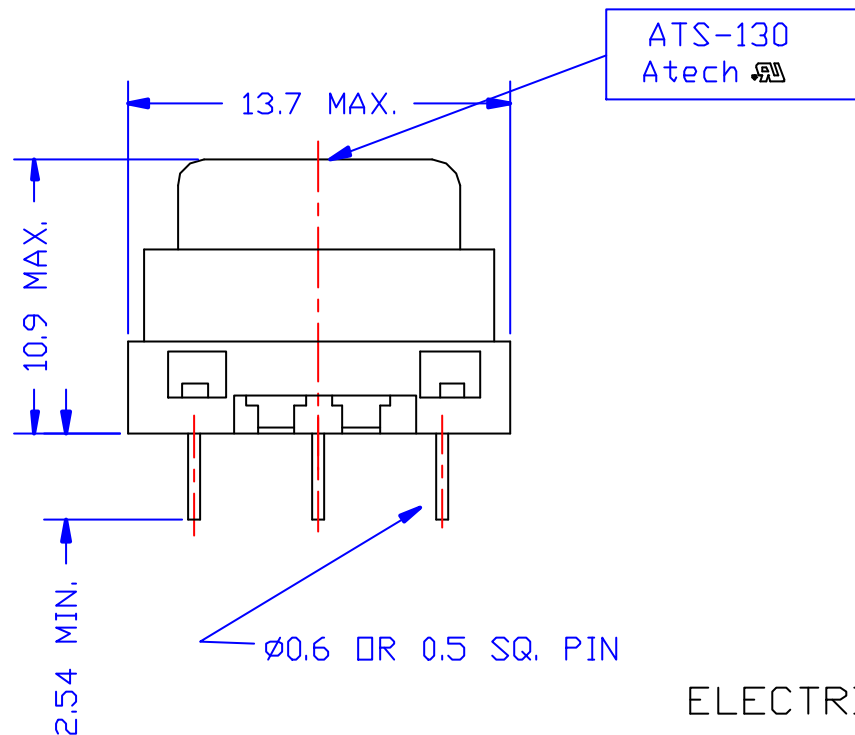

BOTTOM VIEW

ELECTRICAL CHARACTERISTICS: (671-8257 COMPATIBLE)

- 1 D.C.R. PIN 1-3 = 59 OHM +/- 10% PIN 4-6 = 80 OHM +/- 15%
- 2 INSERTION LOSS = 1.5dB MAX. (AT 1KHZ, 0dBm)
- 3 FREQ. RESP = +/- 0.5dB(REF. TO 1KHZ) AT 300HZ TO 4KHZ
- 4 RETURN LOSS = @200~4KHZ = 14dB MIN.
- 5 TURN RATIO = 1:1 +/- 1%
- 6 POLARITY = PIN 1-4 INPHASE
- 7 LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
- 8 HI-POT = 3750 VAC, 1 MINUTE(PRI.-SEC. ONLY)

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600: 475 TRANSFORMER	
							DWG. NO. ATS-130	
	RELEASE	02/08/01	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/08/01		DRAW <i>Pair</i>
REVISIONS								