
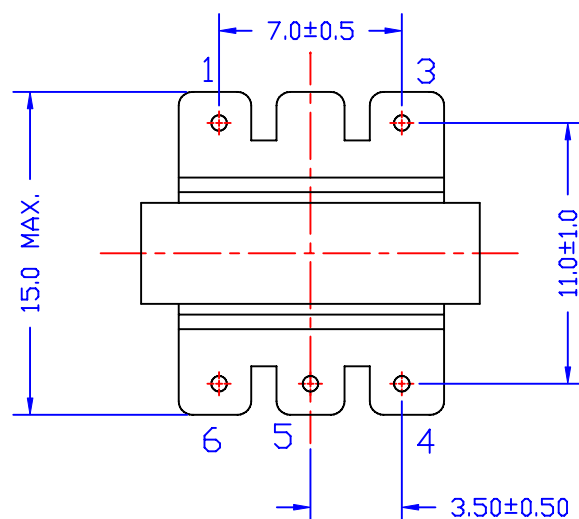
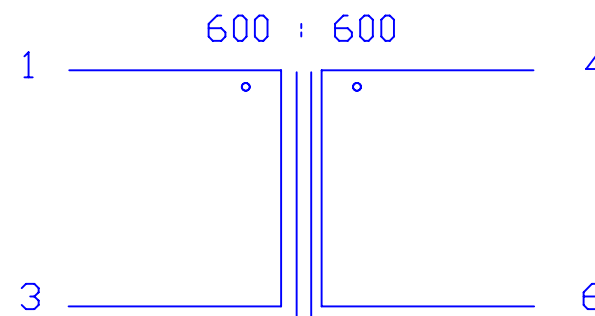


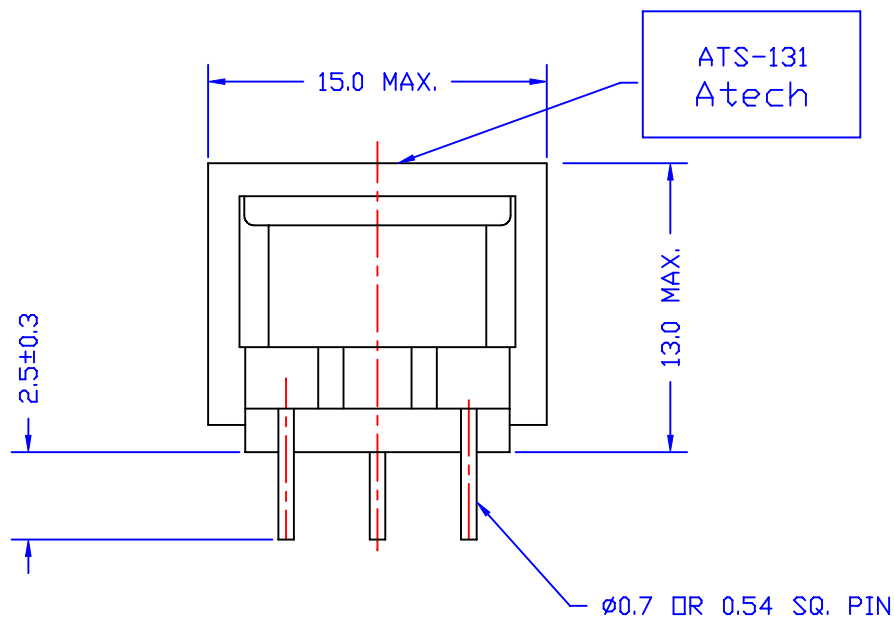

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 30 Ω M $\pm$ 15% , PIN 4-6 = 38 Ω M $\pm$ 15%
2. PARALLEL INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 1.5H MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 600 Ω M)
PIN 1-3 = 600 Ω M $\pm$ 5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 Ω M) : 1dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = $\pm$ 0.35dB
@4KHZ = $\pm$ 0.35dB
6. RETURN LOSS (REF. 600 Ω M) : @300HZ = 19 dB MIN.
@1KHZ = 22 dB MIN. @4KHZ = 23 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
HI-POT(1200VAC, 1mA, 1MINUTE) : PIN 1-4

C	ULMARKING	10/17/2006	PAIR	WILLIEN	EUGENE	Atech [®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE 600 : 600 TRANSFORMER
B	ADD SQ. PIN	12/22/00	PAIR		SUEDY		DWG. NO. ATS-131
A	Z= $\pm$ 5%						
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/31/96	
REVISIONS							SHEET 1 OF 1
							DRAW <i>Pair</i>