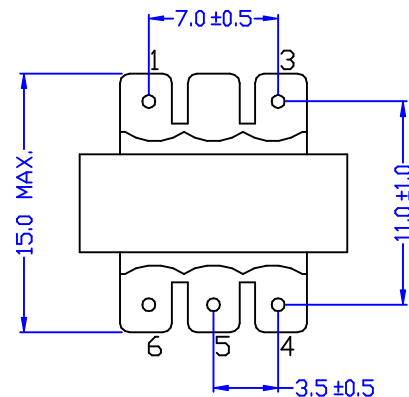
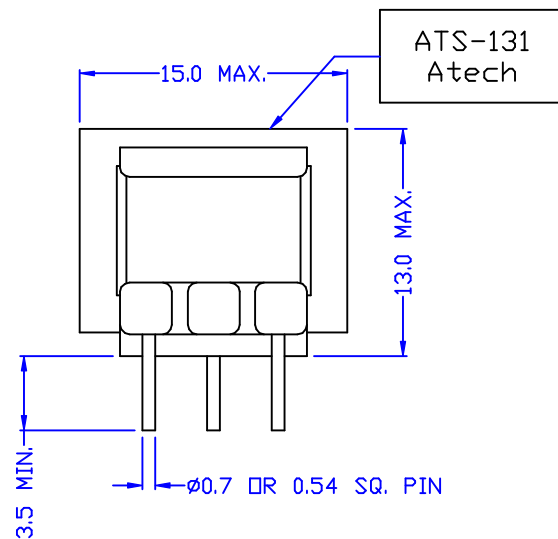


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 33 OHM $\pm$ 15%
PIN 4-5 = 5-6 = 20.5 OHM $\pm$ 15%
- INDUCTANCE PARALLEL (@300HZ, 1Vrms) : PIN 1-3 = 2.54H MIN.
- INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 600 OHM) : PIN 1-3 = 1dB MAX.
- FREQ. RESP (@REF 1KHZ) : (<300HZ) = $\pm$ 0.35dB
(<4KHZ) = $\pm$ 0.35dB
- RETURN LOSS (@REF 600 OHM) : (<300HZ) = 20dB MIN.
(<1KHZ) = 22dB MIN.
(<4KHZ) = 22dB MIN.
- TURN RATIO (@18KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
PIN 6-4 : PIN 5-4 = 2 $\pm$ 1%
- HI-POT (@1200VAC, 1mA, 1MIN) : PIN 1-4

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER		
A	MARKING	03/27/2002	DOLLY	AL		SUEDY	DWG. NO. ATS-131C	
	RELEASE	08/15/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/15/01		DRAW <i>Pair</i>
REVISIONS								