
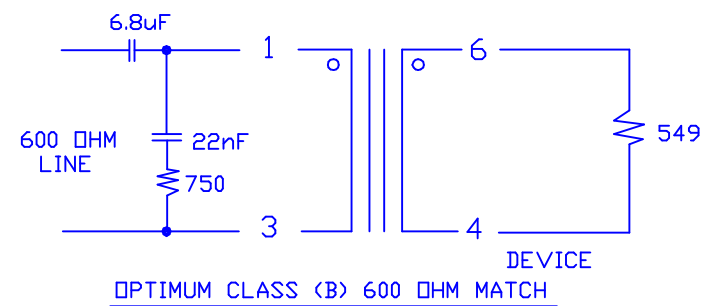
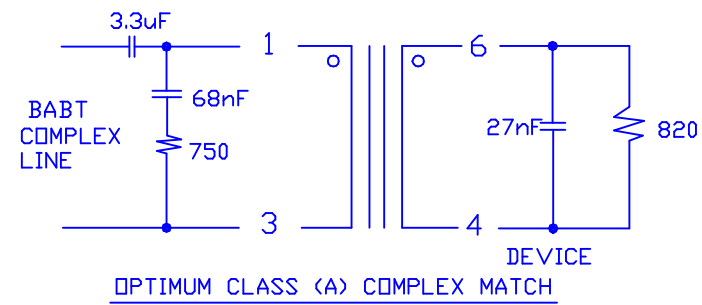
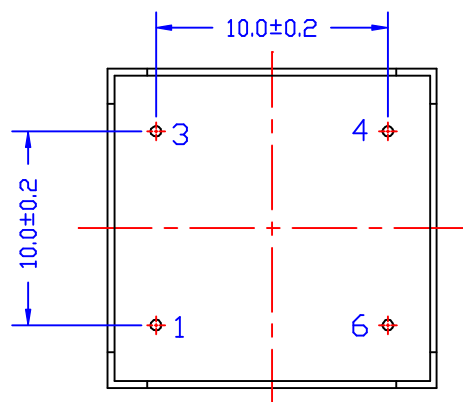


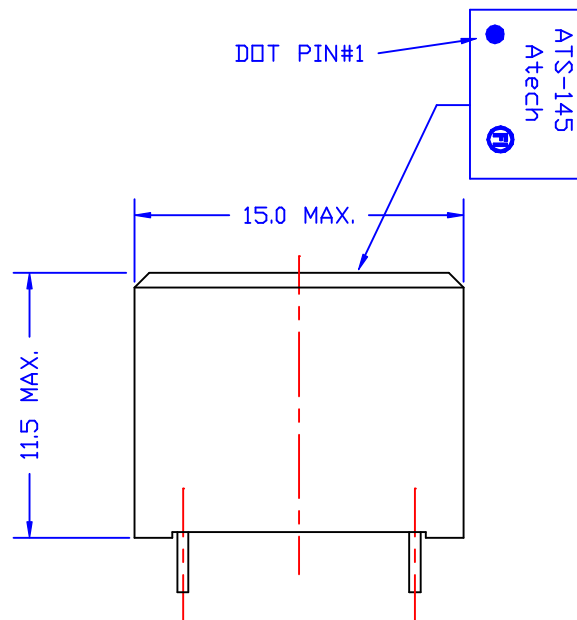

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH CWC 9005)

1. D.C.R. : PIN 1-3 = 55 OHM MAX. PIN 6-4 = 55 OHM MAX.
2. INDUCTANCE(@200HZ,0.25 Vrms, PARALLEL) : PIN 1-3 = 2H MIN.
3. RETURN LOSS : (REF. BABT CLASS"A") @200HZ = 18dB MIN.
@500HZ = 20dB MIN. @2.5KHZ = 20dB MIN. @4KHZ = 20dB MIN.
4. INSERTION LOSS : (@1KHZ,0dBm,4-6 W/H 600 OHM)1.2dB MAX.
5. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = +/-0.35dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (10KHZ, 0.25Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 450HZ, 0dBm : -70dB MAX.
9. HI-POT : (4000 VAC, 1mA, 1MIN.) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE BABT TRANSFORMER	
B	Ø0.6 OR 0.5 SQ. PIN	03/31/98	PAIR		SUEDY			DWG. NO. ATS-145	
A	CHANGE DIM					UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE		PAIR		SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	FI 504		
REVISIONS						12/12/94			