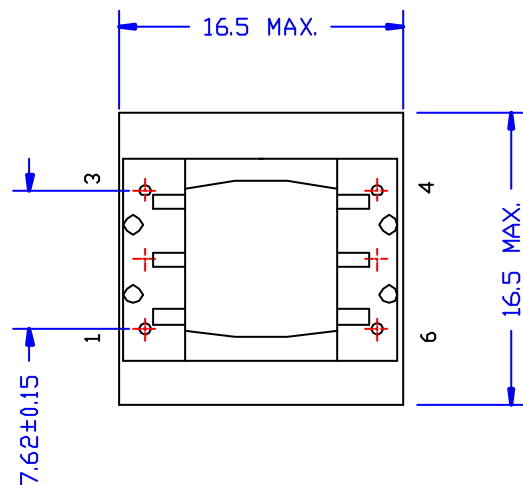
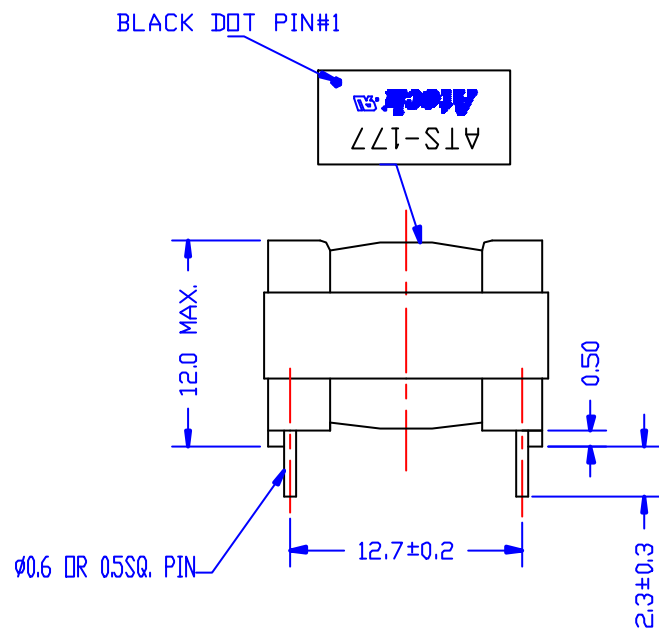


ELECTRICAL CHARACTERISTICS: (FOR V.34)

1. D.C.R. : PIN 1-3 = 150 OHM+/-10% PIN 6-4 = 150 OHM+/-10%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL): PIN 1-3 = 35H MIN.(40H TYP.)
3. RETURN LOSS : (REF. 600 OHM) 250 TO 4KHZ = 32dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 3+/-0.3dB
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (6KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 300HZ, -10dBm : -86dB MAX.
9. HI-POT : (@1250VAC. 1mA, 1MINUTE) PIN 1-6

						Atech [®]		TITLE 600 : 301 TRANSFORMER	
B	ADD UL	06/17/98	PAIR		SUEDY	Atech Technology Co., Ltd.		DWG. NO. ATS-177	
A	Ø0.6 OR 0.5 SQ. PIN	03/31/98	PAIR		SUEDY	TEL:(02)2794-6667 FAX:(02)2794-8004			
	RELEASE	03/01/96	PAIR		SUEDY	UNITS M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/01/96		E159603	
REVISIONS								SHEET 1 OF 1	
								DRAW Pair	