
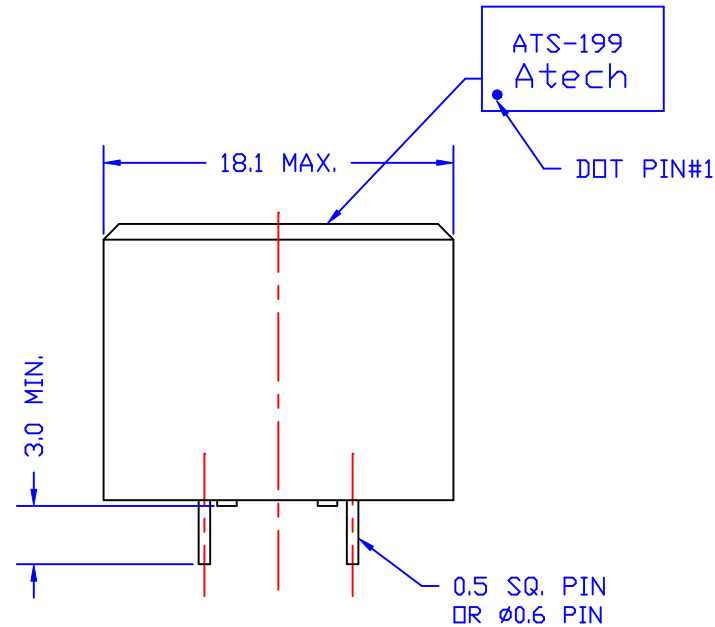
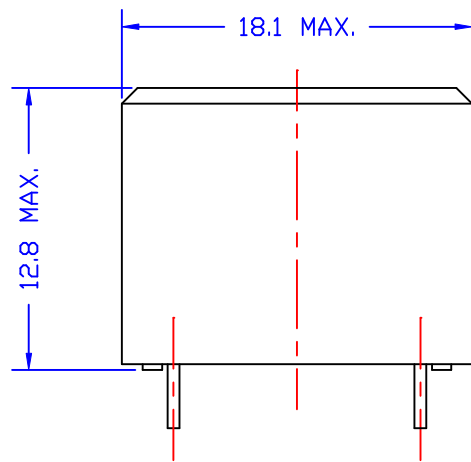


OPTIMUM CLASS (B) 600 OHM MATCH

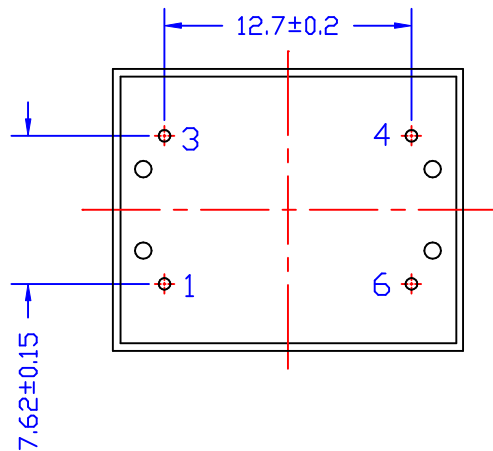

ELECTRICAL CHARACTERISTICS: (TRUE V.34b1s 3750V)

1. D.C.R. : PIN 1-3 = 80 OHM+/-10% PIN 6-4 = 100 OHM+/-10%
2. INDUCTANCE(@1KHZ,0.1Vrms) PIN 1-3 = 4H MIN.
3. LEAKAGE INDUCTANCE(@1KHZ,0.1Vrms) : PIN 1-3 = 8mH MAX.
4. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 32dB MIN.
@ 1KHZ = 42dB MIN.
5. INSERTION LOSS : (@1KHZ, 1Vrms) 1.7dB MAX.
6. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.08dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
8. TURN RATIO : (@5KHZ, 0.1Vrms) PIN 1-3 : 4-6 = 1+/-1%
9. DISTORTION : 300HZ, -10dBm : -86dB MAX.
10. HI-POT : (3750 VAC, 1mA, 1MIN.) PIN 1-6
11. LEAD-FREE

						Atech®		TITLE 600 : 422 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-199N	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
A	ERASE CRC	12/19/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	11/19/2004	PAIR	AL	SUEDY	DATE		SHEET 1 OF 1	
ND	DESCRIPTION	DATE	BY	CHK	APPD	11/19/04		DRAW Pair	
REVISIONS									