
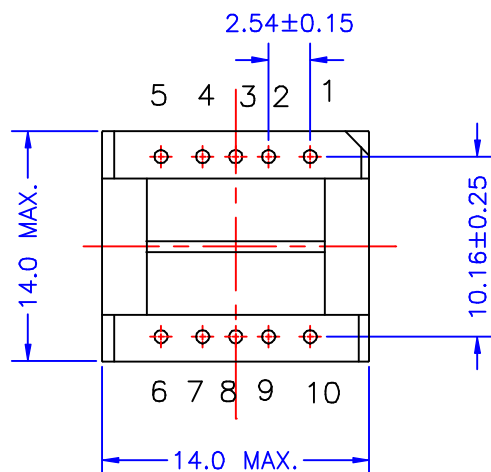
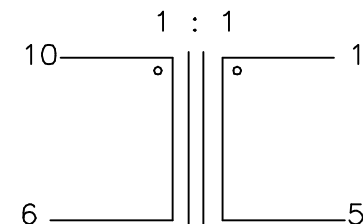
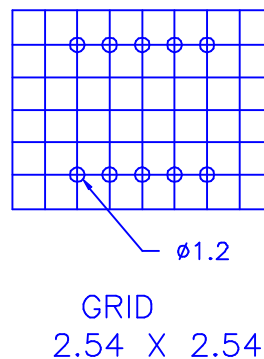


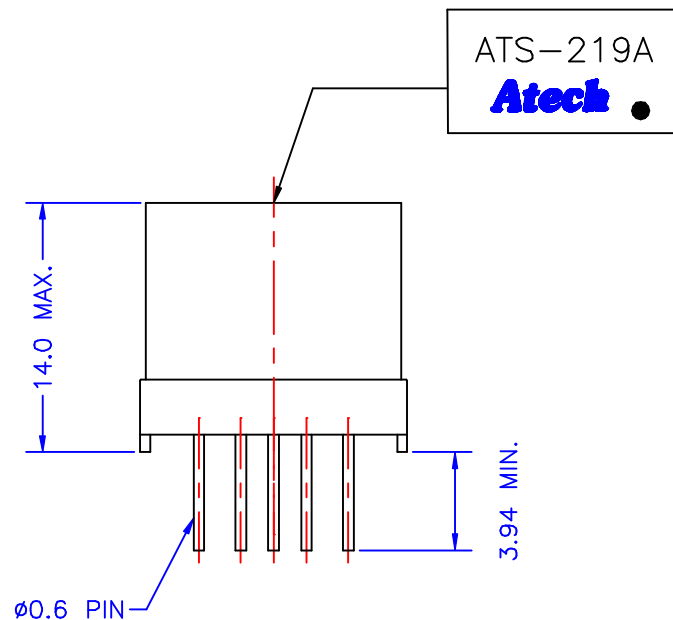

ELECTRICAL CHARACTERISTICS:(COMMON CHOKE FOR BROADBAND)

1. D.C.R. : PIN 1-5 = PIN 6-10 = 2.8 OHM MAX.
2. INDUCTANCE (@100KHZ, 0.1Vrms,)
 - PIN 1-5 = PIN 6-10 = 7mH+/-8%
3. D.C.R UNBALANCE : PIN 1-5 : PIN 6-10 = 1+/-3%
4. INDUCTANCE UNBALANCE : PIN 1-5 : PIN 6-10 = 1+/-1.5%
5. INTERWINDING CAP. (@100KHZ, 0.1Vrms) : PIN 1-10 = 10pF MAX.
6. TURN RATIO (@108KHZ, 1Vrms)
 - PIN 1-5 : PIN 10-6 = 1+/-2%
4. HI-POT (@500VAC, 1mA, 1sec) : PRI-SEC

						Atech [®]		TITLE BROADBAND COMMON CHOKE	
B	D.C.R	03/30/01	PAIR		SUEDY	Atech Technology Co., Ltd.		DWG. NO.	
A	INTERWINDING CAP.	03/01/01	PAIR		SUEDY	TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-219A	
	RELEASE	02/08/01	PAIR		SUEDY	UNITS:		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						02/08/01		Pair	