
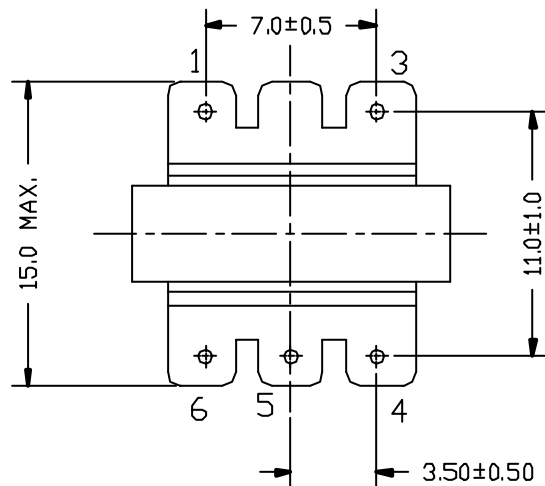
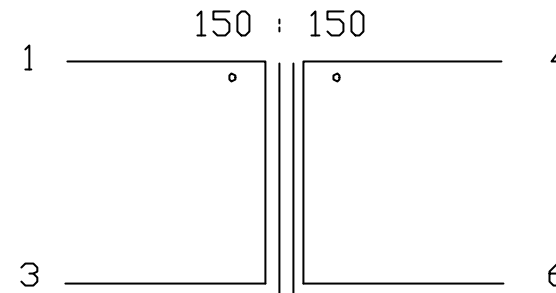


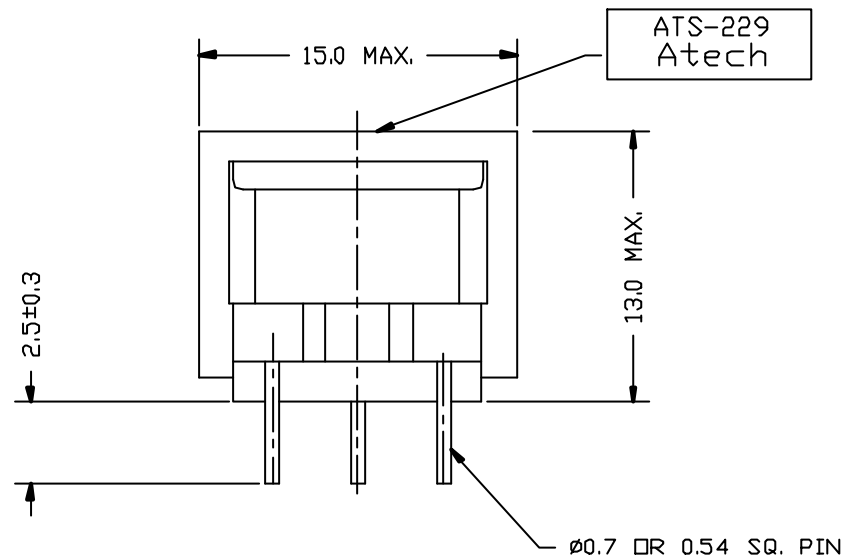

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 7 Ω M MAX. , PIN 4-6 = 9 Ω M MAX.
2. PARALLEL INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 320 mH MIN.
3. IMPEDANCE (@1KHZ, 0dBm, 4-6 W/H 150 Ω M)
PIN 1-3 = 150 Ω M+/-5%
4. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 150 Ω M) : 1 dB MAX.
5. FREQ. RESP.(REF. 1KHZ): @300HZ = +/-0.35dB
@4KHZ = +/-0.35dB
6. RETURN LOSS (REF. 150 Ω M) : @300HZ = 22 dB MIN.
@1KHZ = 25 dB MIN. @4KHZ = 25 dB MIN.
7. TURNS RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT(@1250VAC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL (02)2794-8887 FAX (02)2794-8884	TITLE 150 : 150 TRANSFORMER	
							DWG. NO. ATS-229	
A	ADD SQ. PIN	12/22/00	PAIR		SUEDY	UNITS M/M	SAFETY	SHEET 1 OF 1
	RELEASE		PAIR		SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						12/31/96		