
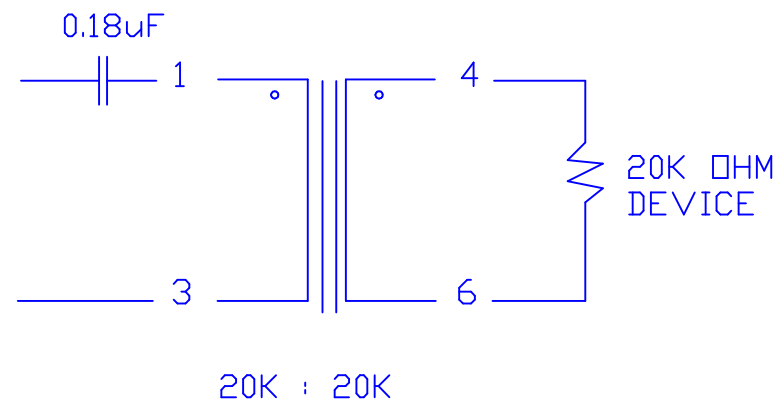
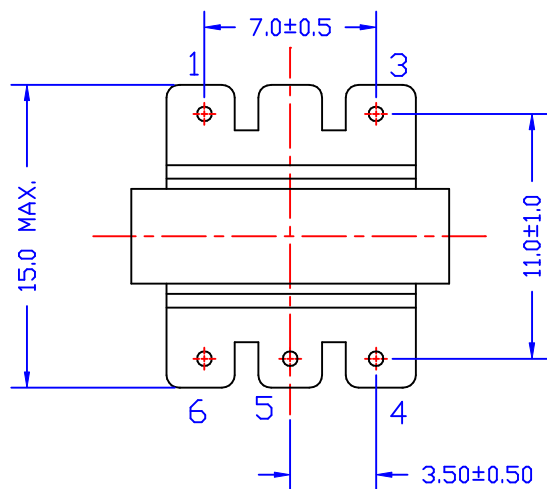


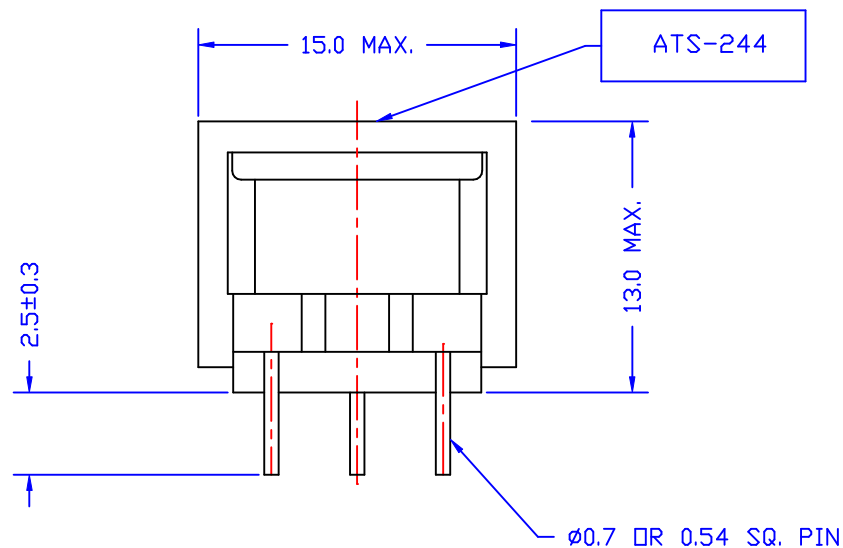

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 1200 OHM MAX. PIN 4-6 = 1550 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 18H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, 4-6 W/H 20K OHM)
PIN 1-3 = 20K OHM+/-10%
4. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 20K OHM) : 1.5dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = +/-0.20dB
@4KHZ = +/-0.20dB
6. RETURN LOSS (REF. 20K OHM) : @200HZ = 25dB MIN.
@1KHZ = 25dB MIN. @4KHZ = 20dB MIN.
7. TURNS RATIO (@9KHZ, 10Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT(@1200VAC, 1mA, 2SEC.) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 20K : 20K TRANSFORMER	
								DWG. NO. ATS-244A	
	RELEASE	08/05/2004	PAIR	ANGEL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 of 1	
REVISIONS						08/05/04		DRAW <i>Pair</i>	