

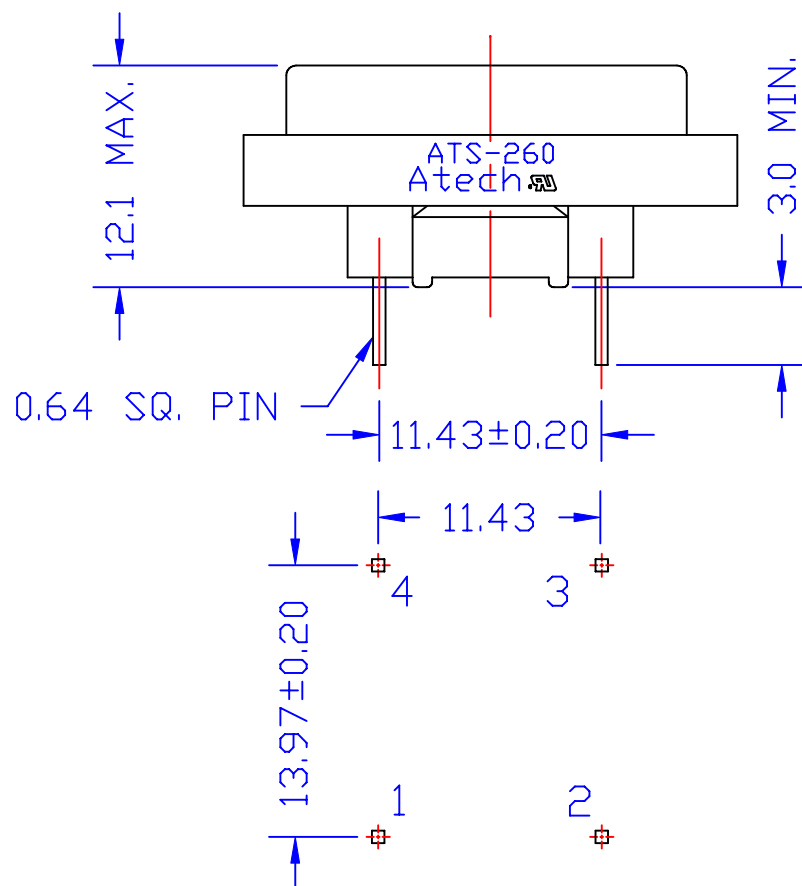


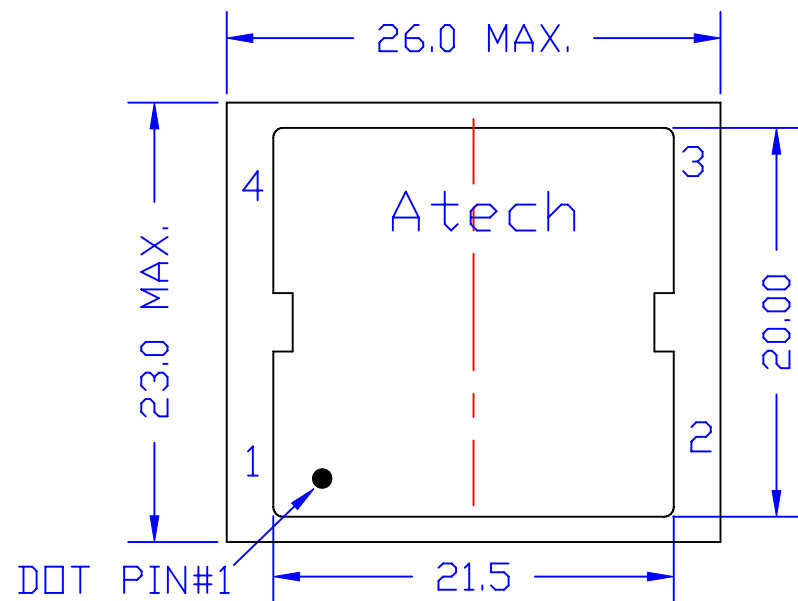

NONE TOLERANCE FOR REFERENCE

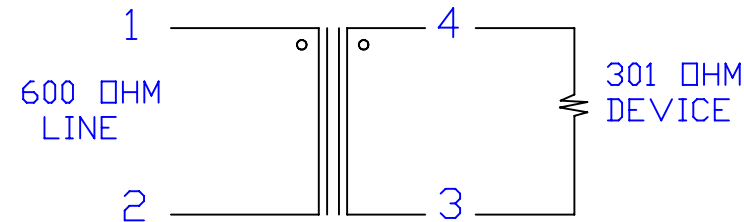

ELECTRICAL CHARACTERISTICS: (FOR V.34 671-9856 COMPATIBLE)

1. D.C.R. : PIN 1-2 = 150 OHM $\pm$ 10% PIN 3-4 = 150 OHM $\pm$ 10%
2. INDUCTANCE(@200HZ,1Vrms, PARALLEL) : PIN 1-2 = 21H MIN.
3. LEAKAGE INDUCTANCE(@200HZ, 1Vrms,SERIES) : PIN 1-2=10mH MAX.
4. RETURN LOSS : (REF. 600 OHM) @ 300HZ = 25dB MIN.
@ 3KHZ = 18dB MIN.
5. INSERTION LOSS : (@1KHZ, 0dBm) 3.0 $\pm$ 0.4dB
6. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
8. TURN RATIO : (5KHZ, 0.1Vrms) PIN 1-2 : 4-3 = 1 $\pm$ 1%
9. DISTORTION : 600HZ, -10dBm : -86dB MAX.
150HZ, -3dBm : -76dB MAX.
10. HI-POT : (@1250VAC, 1mA, 2SEC.) PIN 1-4
11. LEAD-FREE

						Atech [®]		TITLE 600 : 301 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-260N
A	DEL MFG.	04/24 /2008	Pair	Michel	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	/11/30 /2004	PAIR	AL	SUEDY	M/M		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	E159603 	DRAW Pair
REVISIONS						11/30/04		