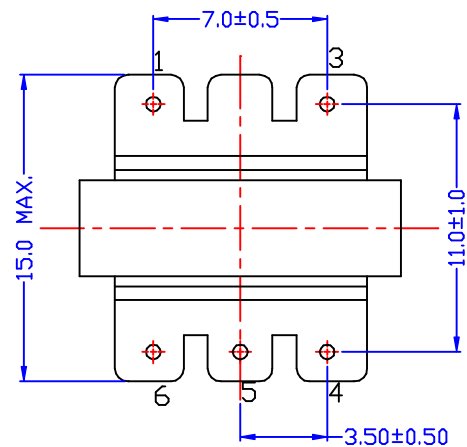
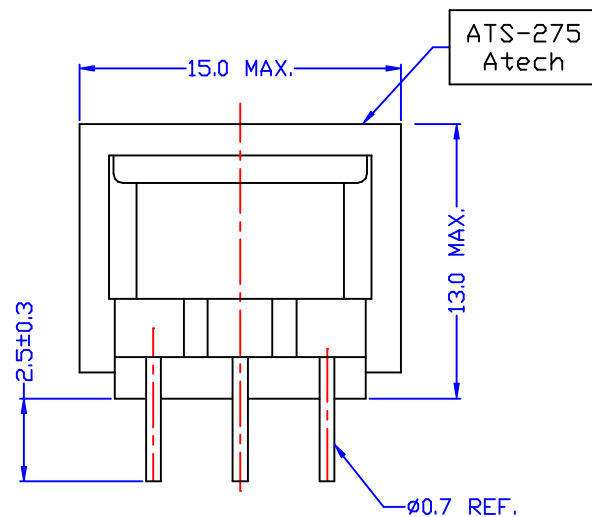


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 350 OHM MAX.
PIN 4-6 = 440 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 4.5H MIN.
3. IMPEDANCE (@200HZ, 1Vrms, 4-6 W/H 5K OHM) : PIN 1-3 = 5K OHM $\pm$ 5%
4. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 5K OHM) : 1dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = $\pm$ 0.3dB
@4KHZ = $\pm$ 0.3dB
6. RETURN LOSS (REF, 5K OHM) : @200HZ = 18dB MIN.
@1KHZ = 20dB MIN.
@200HZ = 18dB MIN.
7. TURNS RATIO (@10KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
8. HI-POT (@1200VAC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 5K : 5K TRANSFORMER	
							DWG. NO. ATS-275	
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS								