
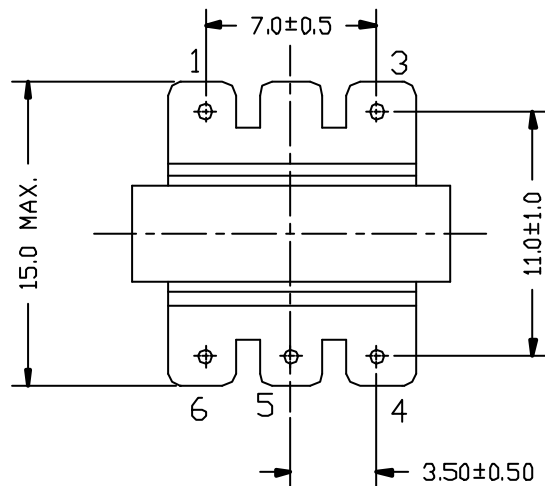
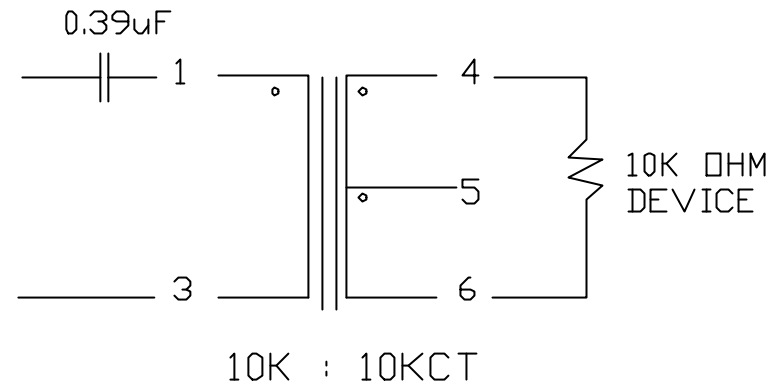


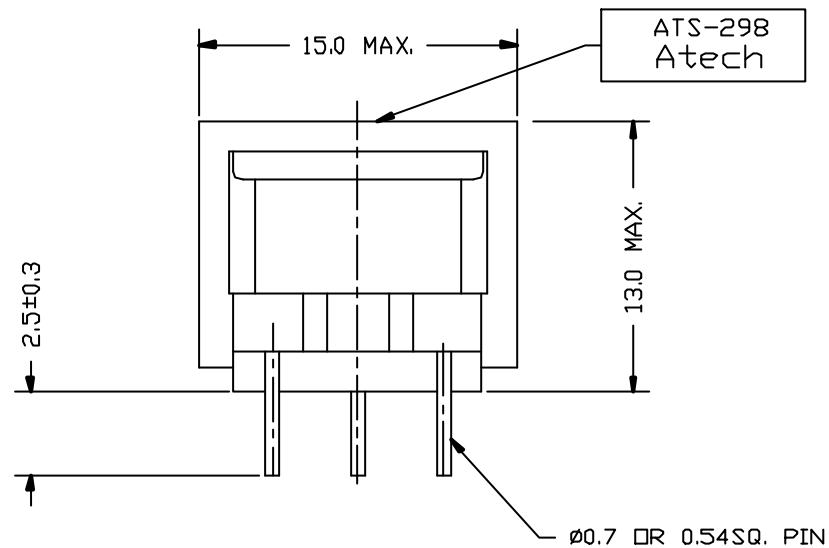

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 650 OHM MAX, PIN 4-6 = 810 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 11H MIN.
3. IMPEDANCE (@200HZ, 1Vrms, 4-6 W/H 10K OHM)
PIN 1-3 = 10K OHM+/-5%
4. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 10K OHM) : 1dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = +/-0.20dB
@4KHZ = +/-0.20dB
6. RETURN LOSS (REF. 10K OHM) : @200HZ = 25dB MIN.
@1KHZ = 20dB MIN. @4KHZ = 20dB MIN.
7. TURNS RATIO (@8KHZ, 1Vrms) : PIN 1-3 : 4-5 = 2+/-1%
PIN 1-3 : 5-6 = 2+/-1%
8. HI-POT(@1200VAC, 1mA, 2SEC.) : PIN 1-4

						Atech®		TITLE 10K : 10KCT TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-298	
A ADD SQ. PIN		12/22/00	PAIR		SUEDY	UNITS M/M		SAFETY	
RELEASE		07/09/98	PAIR		SUEDY	DATE		SHEET 1 OF 1	
NO. DESCRIPTION		DATE	BY	CHK	APPD	07/09/98		DRAW Pair	
REVISIONS									